

SHUMATI

SPRING

0445120109 Injector CRIN2L Technical File

Stand	i St ^{all}
1.0445120109 Injector's Introduction	2
1.1. 0445120109 Injector's Basic Information	2
1.1. 0445120109 Injector's Basic Information 1.2. 0445120109 Injector's Common Part Number	2
1.3.0445120109 Injector's Matching Information	2
1.4.0445120109 Injector's Parameter	2
1.6. 0445120109 Injector's Quality Control	3
1.7. 0445120109 Injector's Customized Service 1.8.0445120109 Injector's Packing List and Package Size	3
1.8.0445120109 Injector's Packing List and Package Size	3
1.9.0445120109 Injector's Testing Standard and Certificate	5
1.10.0445120109 Injector's Warranty Instructions	5
1 11 0445120109 Injector's Manufacturer	6
2.0445120109 Injector Technical Support 2.1.0445120109 Injector's Part Number Location	6
2.1.0445120109 Injector's Part Number Location	6
2.2.0445120109 Injector's Application Scenarios	
2.3.0445120109 Injector's Installation	7
2.4. 0445120109 Injector 's Reasons for Not Working Normally	
2.5. 0445120109 Injector 's Causes of Damage	8
2.5. 0445120109 Injector's Causes of Damage 2.6.0445120109 Injector's Technical Support Obtaining Methods	8
3 0445120109 Injector's Purchase and Delivery	0
3.0445120109 Injector's Purchase and Delivery 3.1.0445120109 Injector's Purchase Payment Term	9
3.2.0445120109 Injector's Main Sales Markets	
3.3.0445120109 Injector's Declaration Requirements	J
3.4.0445120109 Injector's Shipping Ways	Ğ
3.5.0445120109 Injector's Lead time	
3.6.0445120109 Injector's Logistics Time for Destination Out of China's Areas	
3.7.0445120109 Injector's Packing	
4.0445120109 Injector's Storage Standard	0
	. 11
5.1: Company Introduction	
5.2. Sales-men's Contact Information	100
	. 13
o copyright statement.	. 13
Store	S_{ij}
the	
Stephen Stephen,	90 ⁶⁰
The De	
Martin,	çi, ^{aj}
These	

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

0445120109 Injector CRIN2L Technical File

1.0445120109 Injector's Introduction

Street Street Street Street 28²⁹ 1.1. 0445120109 Injector's Basic Information

	01101201	•••••	00001 0 2 A							
	Title	З,	China	made ne	w high q	uality diesel injector	04451201	.09 fuel in	jector CRIN2I	S
Styles.	SKU 1	ŝ	den al de la compañía	1000	-5600	G1W20445120	109	1977 - ST	Sec. Star	$\langle \hat{c} \rangle_{\mathcal{C}^{2}}$
	SKU 2									
	the west	(C) 	19 ⁵⁰	and and a start of the	S	Tank Tank	and the	ant a	the all	19
1.2.	04451201	<mark>09</mark> Inj	ector's Cor	nmon Pa	rt Numb	er ^{ater} ster	ST - 9	m - 97	- 53°-	-92%

1.2. 0445120109 Injector's Common Part Number

(1) Injector's Exchange Information

		A. A. A. A.
Injector Part Number	Universal Part Number	Re-manufactured Part Number
0445120109	0445120467	0 986 435 637
	Mary Mary Mary	Then Then Then Then
and the state of the	ورايد المستقلون المستقلون المستقلون المستقلين	[M. 그것에 그것에 그것에 그것에 그것에 주셨다.

(2) Injector's Application Information

Injector Part Number	MITSUBISHI FUSO TRUCK & BUS CO Car ModelMERCEDES-BENZ Car ModelME357728ME358546//ME357728ME358546	MERCEDES-BENZ Car Model
0445120109	ME357728	ME358546
0445120467	an alan alan ala alan alan alan	at at at at
0 986 435 637	ME357728	ME358546

(2) Injector's Part Number Common Writing

0445120109, 0 445 120 112, 0445 120 112, 0445120 112, 0 445120112, 0 445120 112, 0445120272, 0 445 120 272, 0445 120 272, 0445120 272, 0 445120272, 0 445120 272, 0 986 435 532

1.3.0445120109 Injector's Matching Information

Vehical brand	Series	Car Model	Engine Model	Production date	Power KW	Horse power	Emission Standards	Manufacturer	Emissions(L)	Cylinder	Power Source V
Ś	trace. ?	stan e	e an	Stor. Store	Stores and	Store -	al second	1300 Stra	St. 200	Stan.	gi ^{gi}
/	. met	. mail 1	. and	and and	5	17800 V	-1000 T	. and at	an and	- 100 FT	
	1 - S	8 - S	(* - ST	an an	53. ⁰⁰⁰	- 18 C	87 - P	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	197	91 ····	\$P.

1.4.0445120109 Injector's Parameter

Adaptation System: Common Rail System

68⁵⁵

Injector Series: 120 Series

Parameter Performance: CRIN2L

Matching Accessories: Gasket 7.73*14.36*1.49)

Injector Type: Electromagnetic Injector

Support System Maximum Pressure: 1,600 Vehicle Configuration Information: MERCEDES-BENZ/MITSUBISHI FUSO TRUCK & BUS CO

-Stari

and the second and a start a start a at Sta 1.5.0445120109 Injector's Specifications and Dimensions

Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V)

. 1997 C . all 1

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Injector_Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 0445120109 Injector's Quality Control

(1) Injector Testing

1990 All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions. 2.300 1 1

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque, 30°

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop. $\mathcal{R}^{\mathcal{W}}$ $s\delta^{2n}$

1.7. 0445120109 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.


Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.8.0445120109 Injector's Packing List and Package Size

(1) Injector Spare Parts List



Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMP	TT Shenzhen Shum	att Technology Co.,	Ltd
Name	Fuel Injector	O-Ring	Gasket
Description	Fuel injector part number: 0445120109	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine
No.		5 5	6
Statur Image Statur			578.00 SIR
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
No.	7	8	9
SAUTAN SAUTA Image SAUTAN SAUTA			
Name	VCI Anti-rust Bag	-Bubble Bag	Injector Packing Box
Description	Prevent fuel injector from rusting	Prevent the injector from being damaged by external forces	Place injector and injector accessories

A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.


O-ring and gasket are disposable installation accessories, and need to be replaced for Stop

re-installation.

A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly and the second No. Carl and. STATE. W.C. art. anter. 197⁴ after using.

 $S_{ij}^{(i)}$ ▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

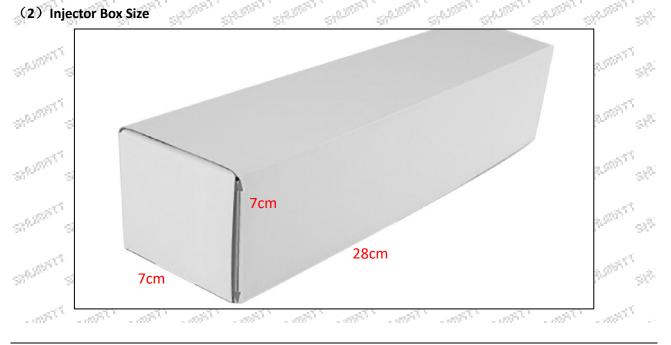

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

ð	No.	Na	me			In	jector Pa	ackage Si	ize(cm))		1.8
01	1	Inject	or Box					28*7*7			 	10
	20			-53	15	15	100	100	100		 	-

1.9.0445120109 Injector's Testing Standard and Certificate

 $-g b_{i}^{2p}$ We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

	96 T	- 347	- 35		- ⁹⁸⁷ - 1	-94. °	24.0	84	84.0	80 m	36.5	244
BOTEN		测试报告	4.05.2019	10:42:09								
伸企业:						57 579-575	STR. STR.	STREET.	STATES	TT STRATTS	SPLETON	e Shi
12:		18址:			12300	130		- A.S.	1. A. 1997	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	and the second	12
4 5 :		检测人:			201.	264	distriction of the	30.0	30.0	30	30	201
ernas: Hiz:		送给单位										
ić:		1000000000				1 519-518	57 578,205	SPATTA	STANDA	514,505	TT SALTON	r sit
有篇:		客户姓名:			. 1. C. S. C.		1	1	°	1. A. 197	1	T
物理》说:金:					20.0	400		ST.	ST.	55	- 97 C	- 9200
3件名称:	BD IS ON											
1号-委件号:												
	200000	5755			572,5757	T SPARS	TT SPRINT	STRUCTOR	STAINS	ri Shirin	¹¹ and	ा भूषे
Kila:	*********				1250	~ A. 300	All and a second	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	- J. 100-	1450		- 193
10112010 - CO-D	MALECON	检测结果			25.7	201	day.	49.0	350	360.0	260	200
		eran Reakory	800×108									
LEAK TEST: 32 Rade: 31		4	30.84"14 41.8429.6	*		A	A	a .	а.	d	an a	-0
WYEN ST		0±165 C)				T STREET	TT SPLEET	57 - 5780008	C. SPUTON	ri Sh ^{anki}	TT SPLEET	7 383
Maar 27 Tu: 28		5±144 C7 ±85 C3		4	530 ⁰⁰⁰⁰	1990 - Carlos Carlos (Carlos Carlos (Carlos (C	-1990-1997 1997	100	100	100	and the second	- 18 ⁰⁰
B.: 14		248 CO		~				-	-			here a
VE: AP	45	61 63		*								
					100	CT SPARSE	TT SPRINT	SPLIDE	S. S	ri Shini	SP-201	6
					SPERA	. 6.5%	1		1	1	1	c St
					C.C.	C.C.	-Ster	ST	ST	Stor	ST	- 97
ei _e2 _e3 _		ar Llas (ARRANS)										
					33.205	r Strat	STRANS	ST STORE	C. SHUDON	T. STRATT	57 519.50%	् इ.हे ³
pr	an ^{an}	- All	999 - 1999 1999 - 1999	See.	- 18 Mar	- 18 March 1990	and the second	all the	and a start	and Store	- A.S.	- 199
	190 î.	1200	100	C	1000	1000	1200	100 C	100.1	100.1	1201	1200

1.10.0445120109 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment 1997 when the injector is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the

engine, 4. Engine noise, 5. oil leakage etc. (2) . Injector Warranty Coverage

Within 15 days after customer receives the 0445120109 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445120109 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 519,200 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

atter with a AND STATES Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and the 11 May 201 185 an star all the

and other issues.

13⁰⁰

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance 527,200 SAUTON 321.20° 34.50 32.503 " state SHAREN SHAREN manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine UNRIT' 17 March DEPET 1 maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445120109 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445120109 Injector Technical Support

2.1.0445120109 Injector's Part Number Location

1) E.g.: The injector part number see as follows




d S	al ^{fr} at	the applicability at the state
	No.	Name
e Se se	Anti	brand, logo, part number, series number
	В	nozzle part number
6	an and	and and and and -

2.2.0445120109 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

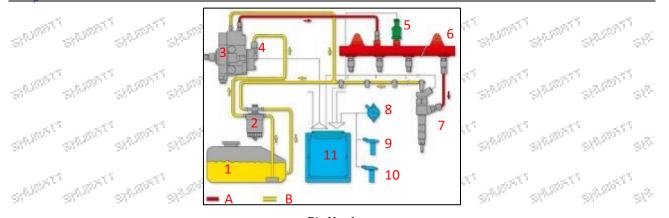

		6	Pic	: No. 1	in the later	1	. A A.
No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
\$ ¹⁰ 2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	B	Low Pressure Oil Circuit
3	High-Pressure Pump	് 7	Injector	11	ECU Electronic Control Unit	100	The The
4	Fuel Gear Pump	8	Accelerator Pedal	al and	all all all		al al

2.3.0445120109 Injector's Installation

SHUMAT

(1) .0445120109 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
 It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445120109 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

▲ Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.5. 0445120109 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
(8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.
 A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6.0445120109 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical File.

(2) Injector Technical Videos

Facebook: Visit <u>https://www.facebook.com/hison.li</u> to get the technical videos, constantly follow can get more information.

YouTube: <u>https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw</u> to get the technical videos, constantly follow can get more information.

Shumatt: Visit <u>http://shumatt.com</u> to get the technical videos.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3.0445120109 Injector's Purchase and Delivery

3.1.0445120109 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

The Then The

. Tree Tree 3.2.0445120109 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

$e^{i\beta \tilde{h}^{(1)}}$ a di ^{fan} **3.3.**0445120109 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: -24.5⁵⁰ contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445120109 Injector's Shipping Ways

179 Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

d Co 3.5.0445120109 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.0445120109 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries	
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days	

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Snenznen Snumatt Technology Co., Ltd						
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days	
South Korea	3 Days	Spain	5-7 Days	Stor Myanmar	5-7 Days	
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days	
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days	
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days	
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days	
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days	
Kuwait	7-10 Days	The The The	at a	the star is	The The	
The logistics tim	ne is for referer	nce only , subjects are a	according to th	e actual arrival.	38 ^{4,000} 58	

3.7.0445120109 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3. Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white

wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.





Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd



39.57 Pic No. 4 Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445120109 Injector's Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion and h 1895 T of the fuel injectors is significantly reduced. 1000 all's 95⁵

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content. SPREAT SALERT

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse - Sharr

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time. - 100⁰⁴⁷⁵

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

1. 19 C. C.

A It is forbidden to store acids, alkalis, salts and other substances together with the injector.

NOR CL

. 1997 - C

. all 1

- The unpacked fuel injector must be rust-proof during secondary storage.
- 5. Company Information

- **Office Locations**
- Global Exhibitions

5.1. Company Introduction Chinese Name: 深圳市舒马特科技有限公司

English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

• Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

STRUMPT' STRUMPT'

SPERMENT

SPAINS

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: 1.10.0445120090 Injector Warranty Instructions)

1.18

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2,000	lvy store	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecc
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
.5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric	+86 18319033618	sales3@shumatt.com		
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	Stor Stor	18 - 18 - 18 - 18 - 18 - 18 - 18 - 18 -
		Visit http://shumatt.com to ob	ptain the latest information of salesme	en	
	d d	PS: Shumatt's sales-men's e	mails are all end with @shumatt.com	1	a a

6. Copyright Statement

150

and Co

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445120109 Injector CRIN2L Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445120109 Injector CRIN2L Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445120109 Injector CRIN2L Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445120109 Injector CRIN2L Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

 $\otimes^{\mathbb{Q}_{2}}$

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd