

SPLIDSTI

0445120020 Injector CRIN1-14/16 Technical File

SHARANT
1.0445120020 Injector's Introduction
1.1. 0445120020 Injector's Basic Information
1.1. 0445120020 Injector's Basic Information
1.3.0445120020 Injector's Matching Information
1.4.0445120020 Injector's Parameter
1.5.0445120020 Injector's Specifications and Dimensions
1.6. 0445120020 Injector's Quality Control 3   1.7. 0445120020 Injector's Customized Service 3
1.8.0445120020 Injector's Packing List and Package Size
1.9.0445120020 Injector's Testing Standard and Certificate
1 10 0445120020 Injector's Warranty Instructions
1.11.0445120020 Injector's Manufacturer
2.0445120020 Injector Technical Support
2.1.0445120020 Injector's Part Number Location
2.2.0445120020 Injector's Application Scenarios
2.3.0445120020 Injector's Installation
2.4. 0445120020 Injector 's Reasons for Not Working Normally
2.4. 0445120020 Injector 's Reasons for Not Working Normally
2.6.0445120020 Injector's Technical Support Obtaining Methods
3.0445120020 Injector's Purchase and Delivery
3.1.0445120020 Injector's Purchase Payment Term
3.1.0445120020 Injector's Purchase Payment Term93.2.0445120020 Injector's Main Sales Markets93.3.0445120020 Injector's Declaration Requirements9
3.3.0445120020 Injector's Declaration Requirements
3.4.0445120020 Injector's Shipping Ways
3.5.0445120020 Injector's Lead time
3.6.0445120020 Injector's Logistics Time for Destination Out of China's Areas
3.7.0445120020 Injector's Packing
4.0445120020 Injector's Storage Standard
5. Company Information
5.1. Company Introduction
5.2. Sales-men's Contact Information
SANDALL SANDAL SA
SANDALL PATIONL

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

and a state of the state of the

. and

Tel: +8675523215133 Website : www.shumatt.com

ATTACK STATE STATE STATES

0445120020 Injector CRIN1-14/16 Technical File

SPURA

SILIDE

37<sup>1,572</sup>

#### 1.0445120020 Injector's Introduction

1.1. 0445120020 Injector's Basic Information

state st	China made new high quality diesel injector 0445120020 fuel injector CRIN1-14/16
SKU 1	G1Y90445120020
SKU 2 🕺	97 97 97 97 97 97 97 97 97 97 97 97 97 9

#### 1.2. 0445120020 Injector's Common Part Number

#### (1) Injector's Exchange Information

Injector Part Number	Universal Part Number	Re-manufactured Part Number
0445120020	0445120019	0 986 435 523

#### (2) Injector's Application Information

Injector Part Number	IVECO Car Number	RENAULT Car Number	RVI (RENAULT VEHICULES IND.) Car Number	DONGFENG Car Number
0445120020	503135250	50 10 477 874/501550956	50 10 550 956	/
0445120019	503135250	50 10 477 874/50 10 550 956	50 10 550 956	/
0 986 435 523	503135250	50 10 477 874/501550956/50 01 866 647/50 10 550 956	50 10 550 956	D5010477874
all and a start	allow allow	all the all the all the all	and the second second	The Walter and

#### (3) Injector's Part Number Common Writing

0445120020, 0 445 120 020, 0445 120 020, 0445120 020, 0 445120020, 0 445120 020, 0445120019, 0 445 120 019, 0445 120 019, 0445120 019, 0 445120019, 0 445120 019, 0 986 435 523

# 1.3.0445120020 Injector's Matching Information

Vehical brand	Series	Car Model	Engine Model	Production date	Power KW	Horse power	Emission Standards	Manufa cturer	Emiss ions(L )	Cylinde r	Power SourceV
RENAULT	Kerax	420 Kerax	dCl 11 C	2001/01- 2006/04	303	412			11.1	6	24
RENAULT	Premium	420 Premium Distribution	dCl 11 C	2000/11- 2006/04	303	412			11.1	6	24
RENAULT	Premium	420 Premium Lander	dCl 11 C	2004/01- 2006/04	303	412			11.1	6	24

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

RENAULT	Premium	420 Premium Route	dCl 11 C	2001/04- 2005/09	303	412		11.1	6	24
-6	1		1. 1.	the set	1	-5	 15	1	5	6

1.4.0445120020 Injector's Parameter

Adaptation System: Common Rail System

Injector Series: 120 Series

1.5<sup>0%</sup>

Parameter Performance: CRIN1-14/16

Matching Accessories: Gasket F 00R J02 175 (7.73\*14.36\*1.49)

Injector Type: Electromagnetic Injector

Support System Maximum Pressure: 1,600

Vehicle Configuration Information: IVECO/RENAULT/RVI (RENAULT VEHICULES IND.)/DONGFENG 43755  $n^{\sqrt{2}k^{N}}$ 

### 1.5.0445120020 Injector's Specifications and Dimensions

Injector Size: 21.5cm\*4 cm \*4 cm = 344cm<sup>3</sup> (L\*W\*H=V) - 53<sup>2,570</sup> Injector Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm\*7 cm \*7 cm = 1372 cm<sup>3</sup> Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

#### 1.6. 0445120020 Injector's Quality Control

#### (1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

-320

#### (2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

### (3) Injector Inspection

~3.1<sup>0000</sup>

NORTH Y

519.375 38.36 The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

### 1.7. 0445120020 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd



(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces. Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

# 1.8.0445120020 Injector's Packing List and Package Size

#### (1) Injector Spare Parts List

No.	i an an an	5 2 S	an 13 an
stor stor	a construction of the second s	- Store - Store	
sh <sup>jal</sup> máge Sh <sup>jala</sup> Sh <sup>jala</sup>			ina 🔘 ina
Name	Fuel Injector	O-Ring	Gasket F 00R J02 175
Description	Fuel injector part number: 0445120020	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine
No.	at a at a at	5°	
Image	TT STR STRAT	art art	SAUR SAN
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
No.			1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 - 19700 - 19700 - 19700 - 1970 - 1970 - 1970 - 1970 - 1970 - 1970 -
Stol Mage Stol		eri eri	s# s#
	റ്റെ താതാ	the dia dia	
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box
1211 - 210 î - 1	Prevent fuel injector from	Prevent the injector from being	Place injector and injector

Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

 O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.


A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com  $\mathcal{A}^{(i)}$ 

cover are recyclable accessories that can be reused.

VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

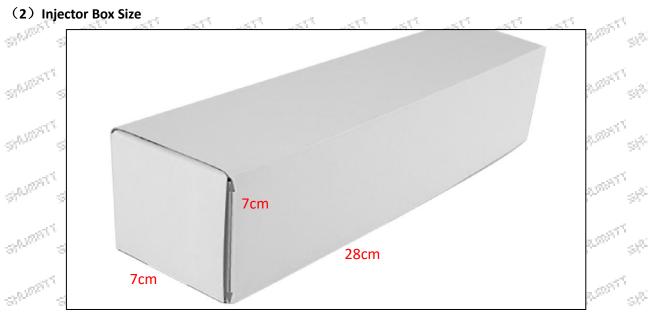

		in the		
-37	No.	Name	Injector Package Size (cm)	84 -
1917 - S	1	Injector Box	28*7*7	
	and the	- 20 - 10 - 10 - 10 - 10 - 10 - 10 - 10	The	

# 1.9.0445120020 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

	n. 30	2	<u> </u>	- 1994 - C	all	da e	Sec.	201	201	241	200
TEN	测试报告	4.05.201	9 10:42:09								
H企业:				100	r steine	57 SPLINE	STALLON STALLON	STALES	SAUDE SAUDE	ari Status	57 17
9121 :	18址:			320	- A. 1990	Aller	add the second	- A.S.	- A.S.	A.S. 19	- 43
4 <b>Ξ</b> :	松潤人:			200	100	201	201	201	353	350.	200
en#15:											
5ið	送检单位。				đ	đ	a .	ari Silutai	17. 519.507	ari Stratte	17 ≅1 <sup>83</sup>
ł¤:	客户姓名:		-	. 68	TT SPRINT	TT SPATTE	SPUTT	10 a. 10 a.	10 a dil	10 a di 1	1
KPRINIE:				200	Sec.	25	- 19 C	1979 - C	200	1997 - C.	- 377
(州名称: )	6 #25										
									-	~	
				32.575	STRUMP	TT SPORT	States	ari. Shutai	SPURI	Strate	17 31 <sup>83</sup>
21A.				133 M	183 M	- A.S.	- A.S.		- 13 ST		a the second
	检测结果	E		58 S. L	200	dian.	200	20.	250	200	200
-00000 : 01088090 : 000000- 10166		excen contrat									
LEAK TEST: 32		es 20.82-11.6	~		A	- A	SILLER	1	10	19	10
Fade: at WARM: at		0 <del></del>	-	15	STREET	ST SPORT	er ande	ST STUDI	an anan	ST. SHERE	17 38 <sup>3</sup>
Mai: 2013		e	~	40 <sup>0000</sup>		Star .	- Star		53000	all and a second	- 20 <sup>00</sup>
TL: 364 LL: 160		0 ·····b·····	1						101-1	100 <sup>-10</sup>	
VE: 42	4.5±1.8	o	*								
					STREET	57 - 5830F	S. State	an Anta	ST. SHEEL	ST. SWEET	1 <sup>57</sup> 1979
				53.205		1	63 <sup>97</sup>	1	1	11	1
				300	- 90.0	-96-	- 63 Co.	681	- 882	- 682.00	- 335.
11 02 02 04 住印前 重注册	desdesdesde8	6915.									
					er Steller	579,500	ST STREET	state	ST. SANTO	ST. SWITT	5 51
çe. Ş	it <sup>yn</sup> si	1,500 S	de an	1.00	100	1.10	- 10 M		- 1.5°	-4.20	
											10.1

#### 1.10.0445120020 Injector's Warranty Instructions

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

with with a start with a start with a start .

12

#### (1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

#### (2) . Injector Warranty Coverage

100 Within 15 days after customer receives the 0445120020 injector, if there is a performance failure and المراجعة the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445120020 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

A Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing. 100 STREET, STREET, STREET, STREET,

# (3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and a state with a state of the state of the and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance - All Street " States, States, States, States, States, - 3<sup>4500</sup> A.S. manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine NEEL maintenance manual. OF T

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.  $\partial D_{2}$ d 1 -

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

#### 1.11.0445120020 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

### 2.0445120020 Injector Technical Support

### 2.1.0445120020 Injector's Part Number Location

1) E.g.: The injector part number see as follows




. 1	No.			Nam	е	
ler.	Stor.	2	brand	, logo, pa	rt numbe	er, 🏁
	A			series nu	mber	
10	ೆ, 8ನೆ	. 64	no	zzle part	number	ас. 19
for.	34.000	30.	30	30.00	24.00	200

SARAT

SHADATT

### -31<sup>0,008</sup> 2.2.0445120020 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.





	and and	0 	Pic Pic	: No. 1	all all as	a an	and a start as
No.	Name	No.	Name	No.	Name	No.	Name
-Aller C	Tank	് 	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	Â	High Pressure Oil Circuit
2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	В	Low Pressure Oil Circuit
3.2	High-Pressure Pump	7	Injector	11	ECU Electronic Control Unit	press.	Charl States of
4	Fuel Gear Pump	8	Accelerator Pedal			-02-1	

# 2.3.0445120020 Injector's Installation

### (1) .0445120020 Injector's Installation Precautions:

A The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector. When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust

- 9<sup>83</sup> spots, etc.

A Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the STATE STATE STATE STATE STATE STATE STATE STATE fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring. The second a and the

Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

A When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual. It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution -SAUDA THERE'S THERE'S THERE

and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

# **2.4. 0445120020 Injector 's Reasons for Not Working Normally**(1) There is air in the cill circuit.

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

ahi<sup>ngh</sup> (3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector - sahar 57<sup>0,500</sup> Star . of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components SANDAR C are stuck or the oil holes are blocked. SHART

Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced. Star Stranger

#### 2.5. 0445120020 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel

 $\mathcal{D}^{\mathbb{N}_{+}}$ 

injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly. A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

### 2.6.0445120020 Injector's Technical Support Obtaining Methods

- (1) Injector Technical File, visit http://shumatt.com to get the technical file.
- (2) Injector Technical Videos

1750 100 25 Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV\_mAfxh\_Hu-aw to get the technical videos, constantly follow can get more information.

**Shumatt:** Visit <u>http://shumatt.com</u> to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

1000

#### 3.0445120020 Injector's Purchase and Delivery and the 1997 - S

#### 3.1.0445120020 Injector's Purchase Payment Term

 $\gamma_{ijk}$ 

**Payment Terms:** T/T, PayPal, Alipay, WeChat

17 C

Please contact our salesmen for specific payment information.

#### 3.2.0445120020 Injector's Main Sales Markets

120 d de Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

## 3.3.0445120020 Injector's Declaration Requirements

anti la Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc. A STORY 2.998 1. 18 F. L

### 2.5055 3.4.0445120020 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided Sh Dar 88<sup>4,300</sup> according to customer requirements in special cases. Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

#### 3.5.0445120020 Injector's Lead time

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and SALESS. SPREED - ALERSON S.R. STREET -382885 SPICE special cases ).

		Hong Kor China	ng, Other Countries or Regions of Asia	Australia and Zealand		Europe	America	Other Countries	
China's Mainla	nd	7 Days	7 Days	8 Days	30.	8 Days	8-12 Days	7-10 Days	
PS Logistics Ti	me:	Country	or Region of Departure	e: China's Ma	inland	d	de sa	an and	
Country of Destination		mated al Time	Country of Destination	Estimated Arrival Time	Cou	intry of Desti	nation	Estimated Arrival Time	
Japan	31	Days	UK ST	5-7Days	4	Egypt	di s	5-7 Days	
Turkey	5-7	Days	Singapore	3 Days	51450	Switzerland	1 A.S.	5-7 Days	
Bahrain	5-7	Days	Latvia	7-10 Days	-1	New Zealan	d	7-10 Days	
Sri Lanka	5-7	Days	Thailand	3 Days	Austria			5-7 Days	
Romania	5-7	Days	Vietnam	3-5 Days		Estonia		5-7 Days	
Malaysia	3-5	Days	ST Israel	5-7 Days	н. 1919 г. н. 19	Mexico	ST and	7-10 Days	
France	5-7	Days	America	5-7 Days	United Arab Emirates			5-7 Days	
Italy	5-7	Days	Netherlands	5-7 Days	κ.,	Bengal	1 - A	7-10 Days	
Lebanon	5-7	Days	Philippine	3-5 Days	3,00	Greece	Stor.	7-10 Days	
South Korea	3 [	Days	Spain	5-7 Days	-	Myanmar	<i></i>	5-7 Days	
Canada	5-7	Days	Germany	5-7 Days	Stop Star	Saudi Arabi	a <sub>Sh</sub> a	7-10 Days	
Portugal	5-7	Days	Australia	5-7 Days		South Afric	а	7-10 Days	
Denmark	5-7	Days	Belgium	5-7 Days	- 10 10	Ukraine	E set	7-10 Days	
India	7-10	) Days	Qatar	7-10 Days	30.0	Poland	50.0	5-7 Days	
Indonesia	3-5	Days	Morocco	7-10 Days	1. 	Pakistan	and wat	7-10 Days	
Kuwait	7-10	) Days	- 41° - 41° - 4	an store	31,00	344	Store .	Star .	

#### 3.6.0445120020 Injector's Logistics Time for Destination Out of China's Areas

The logistics time is for reference only, subjects are according to the actual arrival. 519.3954 SALTER SPACE 3.4.5<sup>53</sup> Allow 49° - 49° -

#### 3.7.0445120020 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, SPARAT

also, the products can be packaged according to customers' requirements.


The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are SALTA non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and SPASSAR white wrapping protective film to avoid personal injury.

and a state of the state of the

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

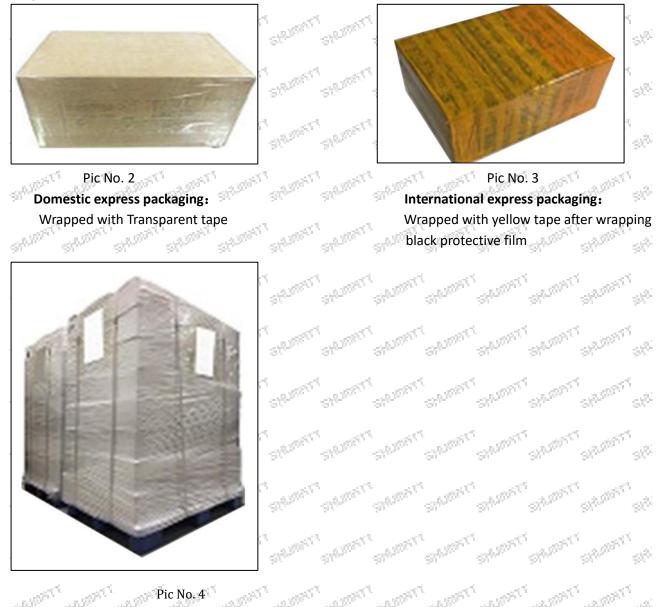

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties\_all<sup>or</sup> all<sup>or</sup> .1.9°

#### 4.0445120020 Injector's Storage Standard

(1) Choose a suitable storage place

17 N 1920 The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkalis, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry. States States.

## (2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

## (3) Keep the warehouse dry and preventing moisture

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : www.shumatt.com The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

#### (4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ▲ It is forbidden to leave the injector exposed in the air for a long time.
  - It is forbidden to store acids, alkalis, salts and other substances together with the injector.
  - The unpacked fuel injector must be rust-proof during secondary storage.

#### 5. Company Information



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

♥ Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

**After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.0445120020</u> Injector Warranty Instructions)

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2	lvy	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3 <b>3</b> 1970 - 1	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	ST Eric S	+86 18319033618	sales3@shumatt.com	S. S.	- 90°
11	Wayne ( Joaquín en español )	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	and and	and the second
30.00	21. 21. 21	Visit http://shumatt.com to ob	otain the latest information of salesmo	en St	- 90° - 90°
		PS: Shumatt's sales-men's e	mails are all end with @shumatt.com	1	

5.2. Sales-men's Contact Information

# 6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445120020 Injector CRIN1-14/16 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445120020 Injector CRIN1-14/16 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445120020 Injector CRIN1-14/16 Technology Co., Ltd., Any actions failure to follow above conditions to use "0445120020 Injector CRIN1-14/16 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

Sterner

SPACE

519320

58<sup>4393</sup>

STREPST

519.3950

 $\mathbb{S}^{\mathbb{N}^{2^{n}}}$ 

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd