









SHUMATT Shenzhen Shumatt Technology Co., Ltd

 $S_{i}^{(0)}$

SALMATT

SPURFT

0445120064 Injector CRIN2-16 Technical File SALON $S^{0,0}$

States States States States States States States Content' States St	i St ^{er}
1.0445120064 Injector's Introduction	2
1.1. 0445120064 Injector's Basic Information	2
1.2. 0445120064 Injector's Commo bn Part Number	2
1.3.0445120064 Injector's Matching Information	2
1.4.0445120064 Injector's Parameter	
1.6. 0445120064 Injector's Quality Control	6
1.7. 0445120064 Injector's Customized Service 1.8.0445120064 Injector's Packing List and Package Size	6
1.8.0445120064 Injector's Packing List and Package Size	6
1.9.0445120064 Injector's Testing Standard and Certificate	8
1.10.0445120064 Injector's Warranty Instructions	8
1.11.0445120064 Injector's Manufacturer	9
1.11.0445120064 Injector's Manufacturer 2.0445120064 Injector Technical Support 2.1.0445120064 Injector's Part Number Location	9
2.1.0445120064 Injector's Part Number Location	9
2.2.0445120064 Injector's Application Scenarios	
2.3.0445120064 Injector's Installation	
2.4. 0445120064 Injector 's Reasons for Not Working Normally	. 11
2.5. 0445120064 Injector 's Causes of Damage 2.6.0445120064 Injector's Technical Support Obtaining Methods	. 11
2.6.0445120064 Injector's Technical Support Obtaining Methods	. 11
3.0445120064 Injector's Purchase and Delivery	. 12
3.1.0445120064 Injector's Purchase Payment Term	. 12
3.2.0445120064 Injector's Main Sales Markets 3.3.0445120064 Injector's Declaration Requirements	. 12
3.4.0445120064 Injector's Shipping Ways	. 12
3.5.0445120064 Injector's Lead time	
3.6.0445120064 Injector's Logistics Time for Destination Out of China's Areas	. 12
3 7 0445120064 Injector's Packing	.13
4.0445120064 Injector's Storage Standard	. 14
'에'	. 15
5.1: Company Introduction	. 15
5.2. Sales-men's Contact Information	. 16
6 Convright Statement	. 16
Street,	st ^{el}
SANDAL	S.C.
SANDALL	-st ^{hi}
The The De The The The The The The The The The	

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMFITT Shenzhen Shumatt Technology Co., Ltd

0445120064 Injector CRIN2-16 Technical File

1.0445120064 Injector's Introduction

39 Street, Street, Street, Street, 1.1. 0445120064 Injector's Basic Information

State State	China made new high quality diesel injector 0445120064 fuel injector CRIN2-16
and and a	and a main a
ണ് sku ട്രീ	G1W20445120064
SKU	W2000B2B120064
12 044E120064 In	jector's Commo bn Part Number

1.2. 0445120064 Injector's Commo bn Part Number

(1) Injector's Exchange Informatio	the the the The The	The the the form
Injector Part Number	Universal Part Number	Re-manufactured Part Number
	1	0986435529
0445120064	The The The The	The Char Char Char
24000 24000 24000 24000 24000 2	fear store star star st	100 Stran, Stran, Stran, Sto

(2) Injector's Application Information

Injector Part Number	KHD Car Model	MAGIRUS-DEUTZ Car Model	RVI (RENAULT VEHICULES IND.) Car Model	VOLVO Car Model
Str Str.	490 2255	490 2825	74 21 006 086	317 - 317 - 317
0445120064	04902825	The The The	74 21 006 085	100 m
0445120064	04902255	stor stor st	74 20 806 011	an an ar
	490 2825	n n n	1 1 1	15 - 15 -
at and a state	4902255	490 2825	74 20 806 011	21006085
00000405500	04902825		74 21 006 086	
0986435529	04902255	and a state of the second s	and same same	all all all all all
201	490 2825	1947 - 1947 - 1948 1947 - 1948	201 201	201 201 201

199⁹ (1997) (3) Injector Part Number's Common Writing

and the

0445120064, 0986435529, 490 2255, 4902255, 0 445 120 064, 0 986 435 529, 490 2825, 4902825, $0445\ 120\ 064,\ 0986\ 435\ 529,\ 74\ 21\ 006\ 086,\ 7421006086,\ 0445120\ 064,\ 0986435\ 529,\ 74\ 21\ 006\ 085,$ 7421006085, 0 445 120064, 0 986 435529, 74 20 806 011, 7420806011, 0 445120064, 0 986435529, 21006085, 0445 120064, 0986 435529, 04902825, 04902255 $\mathfrak{gl}^{[k]}$

an an

st^{all}

SAUTI

1.3.0445120064 Injector's Matching Information

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Vehical brand	Series	Car Model	Engine Model	Production date	Power KW	Horse power	Emission Standards	Manufacturer	Emissions(L)	Cylinder	Power Source V
RENAU LT	Midlum II	180 Midlum II	DXi 5 180	2009/04- 2014/12	132	180	a. a	AUDIT SHOT	si ^{4.8}	A A S	ð 24
RENAU LT	Midlum II	220 Midlum II	DXi 5 220	2009/04- 2014/12	162	220	States 1	ALEAST SPACE	4.8	4 5	24
RENAU LT	Midlum II	300 Midlum II	DXi 7 300	2009/04- 2014/12	221	300	States S	ALENT SALE	7.2	6	24
RENAU LT	Standard Sta	240 Premium II Distributi	DXi 7 240	2006/06- 2009/03	3/8-57 177	240	States S	and and	7.2 1 ¹	6 6	24 8.
RENAU LT	Premium (F.	270 Premium II Distributi on	DXi 7.270	2009/04- 2014/12	199 3 ¹⁰⁰	5 ^{1 270}	T SHUTT S	NICONT - SALO	11 7.2 Stanti	19.500 FT	24 8-
RENAU LT	Premium II	270 Premium II Lander	DXi 7 270	2009/04- 2014/12	8 ⁷⁷ 199 578-07	270	SPACE S	NUMAL SHIM	11	19.50 677 S	24
RENAU LT	Premium II	280 Premium II Distributi on	DXi 7 280	2006/06- 2009/03	206	280	IT SHADATT S	AUDINT SIAUDI	™ _{37.2} ™	12.46 S	24
RENAU LT	Premium II	280 Premium II Distributi on	DXi 7 280	2007/03- 2009/03	206	280	a a	ALEAN SALE	7.2	65	24
RENAU LT	Premium II	280 Premium II Lander	DXi 7 280	2007/03- 2009/03	206	280	States S	ALTER STATE	7.2	1999	24
RENAU LT	Premium II	310 Premium II Distributi on	DXi 7 310	2009/04- 2014/12	3705 228 571 57835	310	States S	ALE THE ALE	7.2 11 - 7.2	6 6 19.570 - 1	24
RENAU LT	Premium U	310 Premium II Distributi on Hybrid	DXi 7 310	2012/06- 2014/12	228 Star	310 SP-000	T SRIDAT S	AUDINT SHUDI	11 7.2 MT	19-50 6 177	24
RENAU LT	Premium II	310 Premium II Lander	DXi 7 310	2009/04- 2014/12	228	310	SPLORT'S	ALEANT STALEN	11 3.7.2 MT		24
RENAU LT	Premium II	320 Premium II Distributi on	DXi 7 320	2006/05- 2009/03	235	320	L. Strand	ANDER SPACE	°€	6 9	24
RENAU LT	Premium II	320 Premium II Distributi on	DXi 7 320	2007/03- 2009/03	235	320	SHATTER S	faller and	7.2	6 S	24

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

											-
RENAU LT	Premium II	340 Premium II Distributi on	DXi 7 340	2009/04- 2014/12	250	340.00		PROVIL PHON	11 31 2.2 011	6 6 S 6	24
RENAU LT	Premium II	340 Premium II Lander	DXi 7 340	2009/04- 2014/12	250	340		ANDAL SHOW	7.2	1 ^{72.60} 6 31 ⁸	24
VOLVO	FE	FE 240	D7F240	2009/05	177	240	SILLER S	ALER SAL	7.1	6	24
VOLVO	STATE S	FE 260	D7F260	2009/05	191	260	STATES	the state	7.1	6	24
VOLVO	FE	FE 300	D7F300	2009/05	221	300	Store S	20 ⁰⁰ - 2000 200 ⁰⁰ - 2000	7.1 11	6 6	12
VOLVO	FE	FE 340	D7F340	2009/05	250	340 3 ^{1,340}	r' stumr's	ANDIT SAID	7.1 1.1		12
RENAU LT	Midlum II. ¹	180 Midlum II	DXi 5 180	2009/04- 2014/12	57 ¹ 132 57 ¹ 17	57 ¹¹⁸⁰	T SPLERT S	patient spatt	10 4.8 m	19.20 4 77 518	24
RENAU LT	Midlum II	220 Midlum II	DXi 5 220	2009/04- 2014/12	162 S	220 J	0	AND STREET	1. 	A. S. A. T. S. A.	24
RENAU LT	Midlum II	270 Midlum If	DXi 7 270	2009/04- 2014/12	199 ⁹⁰⁰⁰	270	5ev 5e	ton stran	[™] ∂7.2 ^{™™}	11.00 6 ST	24
RENAU LT	Midlum II	300 Midlum II	DXi 7 300	2009/04- 2014/12	221	300		Allert' Spall	7.2	6 50	24
VOLVO	STRUKER IN	FE 240	D7E240	2006/05-	117	241	a .a	A.500 - 574.50	7.1	6 6	12
VOLVO	FE	به المعلم ال - معلم المعلم	D7F240	2009/05-	51 ⁹²⁰ 117	240	SPARAN S	1.00 ⁰⁰ - 51.00	7.1	6	24
VOLVO	FE FE	FE 260	D7F260	2009/05-	191	260	n Nation States	erent and	7.1 11	6	24
VOLVO	FE C	FE 2801	D7E280	2006/05-	206	280	n _{Stenn} n s	patient and	5 7.1 Marine 1		24
VOLVO	STREET	FE 300	D7F300	2009/05-	221	300 Sec. 10	a	ATTENT SALE	11 7.1 17 1		12
	. met	- 100 ⁴⁷⁵		¹⁷⁴ 00		5°	Prem. Pr	. ali ^{gta} . ali	10 . and		

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

VOLVO	STREET	FE 300 Hybrid	D7F300	2011/04-	221 ST	301 JUN	IT SHARENTS	ALONT SALO	17 320M	1 ^{12,20} 6 ⁷⁷⁷ 53	12	
VOLVO	Stoffe -	FE 320 😴	D7E320	2006/05-	235 ^{0,277}	320		AUDINT SHADI	€. 27.1	ALCONT OF	24	
VOLVO	STREET	FE 340 S	D7F340	2009/05-	250	340	SPART	AJEANT' SPALED	7.1 S	NA-05757 5	12	
VOLVO	STATES	FE 340 Hybrid	D7F340	2011/04-	250	340	Station S	ALEN SALE	7.2	6	12	
VOLVO	SAUTO S	FL 240	D7E240	2006/05-	177	241	States S	anter and	7.1	1999 - 50 6 	24	
VOLVO	FL Start	21 Y2	D7F240	2009/04-	37- 177	240	sr s Summa	al and a star	7.1 1	6 19	24	
VOLVO	FL ST		D7F260	2009/04-	191 STR.57	57 260 STRUM		PROFILE SPECI	~ 7.1 ~	1999 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 -	24	
VOLVO	STOREST T	FL 280	D7E280	2006/05-	206 St. 100	5 ⁷⁷ 280 510		ANDIN' SPACE	5 ⁷⁷ 7.1 St ^{ree} 5	19.27 6 77	24	
VOLVO	STAR STAR	FL 290	D7F290	2009/04-	213	290	5e.e. 5e	Prov. Styles	1	11.00°	24	
VOLVO	STEL	FL 320	D7E320	2006/05-	236	320 ⁻⁵⁷⁵	STADAT'S	ALENT SALES	7 .	19-96 S	24	
	18	100	Sec.	and the second	al de	6°	S	all a	Sec. Sec.	and the second		

AN AN AN

1.4.0445120064 Injector's Parameter

Adaptation System: Common Rail System Injector Series: 120 Series

1585 Parameter Performance: CRIN2-16 Matching Accessories: Gasket (7.73*14.36*1.49)

510,000

Injector Type: Electromagnetic Injector

Support System Maximum Pressure: 1,600

SPACE SP 201 Vehicle Configuration Information: KHD\MAGIRUS-DEUTZ\RVI (RENAULT VEHICULES IND.) \VOLVO SHARAST SPLEET SPREDNET SUSSI SPARST

SPREED

1.5.0445120064 Injector's Specifications and Dimensions SPRINGER **Injector Size:** 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V) Injector Net Weight: 0.55kg Gross Weight: 0.6kg

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

. 19⁶⁶

 $\otimes^{[0]}$

 $\phi \delta^{(i)}$

Injector_Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 0445120064 Injector's Quality Control

2.555

132

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

 $ql^{0,0}$

(2) Injector Assembling


And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

(3) Injector Inspection

35⁵ 100 The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 0445120064 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.

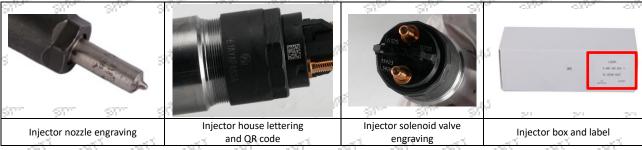

(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

108⁶⁷ , 10^{297, 1} Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.8.0445120064 Injector's Packing List and Package Size

(1) Injector 9	Spare Parts List	e, stran, stran, stran,	States Street, States, Sta		
No.	1	2	3		
States of States			ant 🔿 (art		
ANTER ANT	Call ^{er} all ^{er} all ^{er} all ^{er}		all		
Name	Fuel Injector	O-Ring	Gasket F 00R J02 175		
Description	Fuel injector part number: 0445120064	Ensure to meet the standard of the sealing	Made of brass, used to ensure the tight fit between the injector cap end		

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

		performance between the injector and the engine	and the engine
N ^{OPE} NoN	4 3		
State State	r ar area	ant ant	51 ^{9,40}
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
No.		8	9
stor stor			Store room No
and Image		SUT ST	st ^h
and a		the first with and	and a still a still
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box
Description	Prevent fuel injector from rusting	Prevent the injector from being damaged by external forces	Place injector and injector accessories

Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.


O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

▲ The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

▲ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

(2) Injector Box Size

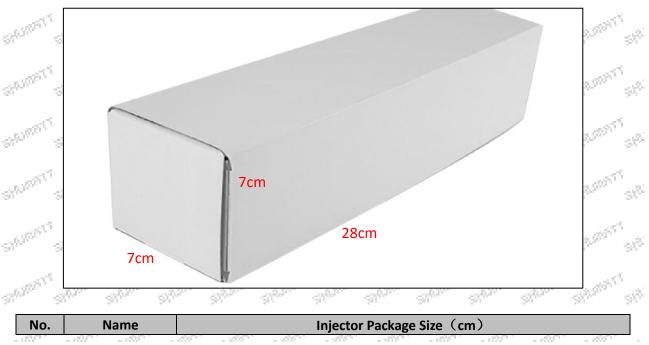

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Injector Box

1.9.0445120064 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

28*7*7

BOTEN	测试报告	4.05.2019 10:42:09			1		с	÷	з. ",	4
录伸企业:			SPREAT	ALTER STATES	de la como	differ	All Car	57.005	518,2057	-9).
407: 	1214 :		20 27	- 9×	20 v	211	201	201	201	1.0
後期:	检测人:						ai			
tið:	送检单位:		SPRINGER SI	STRUCT SUSTAN	STREET				1. and 1.	1
倚真:	客户姓名:		- 58° - 59	an alan	Star.	Store	Star.	Star -	Star.	Ş
林時說述:										
如料名称: <u>除</u> 事	a		100	and an	t al	1	1	5	5	(S
28-949: 			STRUEBULT	RADONT SPRADE	STRATION	all the	de la composition	T SPANIS	T SPRETONT	ø
	检测结果	1	2.1 2.		24.2	201	241	04.1	26.1	
00010001010 : C00000-651 1010063810	1	ene and	1	× .	a			a	к	a l
LEAN TEST: 32 Rade: 33	45 357	2082-118 V 4882-118 V	SPRATHT	RUTERT SPRITT	SPLITTER		1. AN	1. and 1977		÷.,
WARDE SA Maio 2013	1470±165 C) 2015±144 C)	·····*	20 - P	lan chan	Stor.	21.00	See.	Sec.	200	Ş
TL: 28.4 11.7 HO	346±85 03 107±48 03	······································								
VE: AP	43218 03	V	-25	Bar Bar	1 - A	i atte	i ali	3 - A	6 - La	65
			53.00 53	REPORT SPRING	SHUMPT	and the second	- States	-19 ¹⁹⁰¹	St. Stor	\$
					-4			per c	per c	1.0
a2a2a4a	nsmsaraskennes		100	1. 1	5. A	(с. "	5	5	8
₩8₩ #.3 ₩			SPREAT S	REPORT SPREAM	SPLIDET	and the second	1.35°	Sall Carl	1.30°	ø
	. St.	24	-814 - 81	680 - 680 - 1	-94.4	84.4	-841	201	222	- 92

1.10.0445120064 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

SHUTT

91⁰³⁶

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) . Injector Warranty Coverage

Within 15 days after customer receives the 0445120064 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445120064 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

SHUMFITT Shenzhen Shumatt Technology Co., Ltd

Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445120064 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445120064 Injector Technical Support

2.1.0445120064 Injector's Part Number Location

1) E.g.: The injector part number see as follows




	No.	Name
de ^{ge}	Â	brand, logo, part number, series number
	B Street	nozzle part number
de S	and a state of the	and an and a start and

2.2.0445120064 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

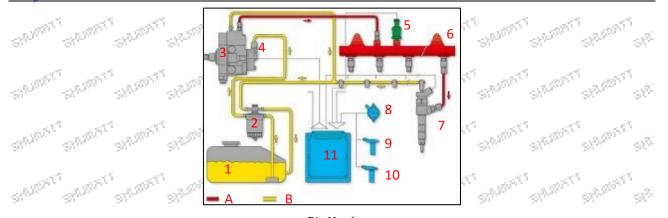

	1	. C.	Pic	: No. 1	h. h. l	1	25. 25.
No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	ر ان ان	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
\$ ¹⁰ 2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	B	Low Pressure Oil Circuit
3	High-Pressure Pump	ر ⁷	Injector	11	ECU Electronic Control Unit	1	The The
4	- Fuel Gear Pump	8	Accelerator Pedal	all and the second	all all all	10 - A	2 - A

2.3.0445120064 Injector's Installation

SHUMATT

(1) .0445120064 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445120064 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.5. 0445120064 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector. 100 C and -120 all's 1780

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed ALTERT'S REFERE ALL REAL the standard, etc. \$300° .

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector. Bar Bar 100 1995 -100

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector. (8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly. Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement. -68^{9,39} -star 38⁰⁰⁰ \mathcal{R}^{2} S^{0}

2.6.0445120064 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

 $c^{(1)}$ Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3.0445120064 Injector's Purchase and Delivery

3.1.0445120064 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

. Then The The Then The 3.2.0445120064 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

2. 69⁷⁵ $e^{i\beta \tilde{h}^{(1)}}$ **3.3.**0445120064 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: : All contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445120064 Injector's Shipping Ways

173 Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

de la 3.5.0445120064 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.0445120064 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

<u>>µuiin</u>		enznen Snumatt	lechnolog	gy Co., Lta	
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Stor Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	The The The	at a	the star is	Teo Teo
The logistics tim	ne is for referer	nce only , subjects are a	according to th	e actual arrival.	51 ^{4,500} 50

3.7.0445120064 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.





Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd



3.^{9.578} Pic No. 4 Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445120064 Injector's Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkalis, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion and h 025 of the fuel injectors is significantly reduced. 100 all's 65

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content. SPREAT SHUMPY

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse - Sharr

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time. - 100⁰⁴⁷⁵

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

. 19⁵⁵

A It is forbidden to store acids, alkalis, salts and other substances together with the injector.

NOR CL

. 1997 - C

. all 1

- The unpacked fuel injector must be rust-proof during secondary storage.
- 5. Company Information

- **Office Locations**
- Global Exhibitions

5.1. Company Introduction Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

• Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

STRUMPT'S RUPPT'

SPERMENT

SAUDAT

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

and and a state and a state of the state of the

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: 1.10.0445120064 Injector Warranty Instructions)

1.18

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube	
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li	
2	lvy store	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY	
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca	
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt	
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt	
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie	
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt	
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li	
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca	
10	Eric	+86 18319033618	sales3@shumatt.com			
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt	
12	Sylvia	+86 18312499884	sales6@shumatt.com	Star Stor	18 - 18 - 18 - 18 - 18 - 18 - 18 - 18 -	
		Visit http://shumatt.com to ok	tain the latest information of salesme	en		
	d d	PS: Shumatt's sales-men's e	mails are all end with @shumatt.com	~	a a	

6. Copyright Statement

an Ch

150

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445120064 Injector CRIN2-16 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445120064 Injector CRIN2-16 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445120064 Injector CRIN2-16 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445120064 Injector CRIN2-16 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

 $S_{\rm eff}$

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd