

320D INJECTOR

3264700

INJECTOR

26

SHUMBTI

SPUTT

SHARAT

320D Injector 282-0490 Technical File

SPREEDET

 $\otimes^{\mathbb{N}^1}$

 $= \otimes^{[0]}$

SPREAT

and streams streams streams streams streams streams streams streams streams

1. 282-0490 Injector Introduction
1.1. 282-0490 Injector Basic Information1
1.2. 282-0490 Injector Common Part Number1
1.3. 282-0490 Injector Part Number Common Writing 1 1.3. 282-0490 Injector Part Number Common Writing 1
1.4. 282-0490 Injector Parameter1
1,5. 282-0490 Injector Specifications and Dimensions1
1.6. 282-0490 Injector Quality Control
1.7. 282-0490 Injector Customized Service2
1.7. 282-0490 Injector Customized Service 2 1.8. 282-0490 Injector Packing List and Package Size 3
1.9. 282-0490 Injector Testing Standard and Certificate
1.10. 282-0490 Injector Warranty Instructions
1.10. 282-0490 Injector Warranty Instructions 5 1.11. 282-0490 Injector Manufacturer 6
2. 282-0490 Injector Technical Support
2.1. 282-0490 Injector Part Number Location
2.2. 326-4700 Injector Application Scenarios
2.3. 282-0490 Injector Installation
2.4. 282-0490 Injector Reasons of Not Working Normally
2.5. 282-0490 Injector Causes to Damage92.6. 282-0490 Injector Technical Support Obtaining Methods9
2.6. 282-0490 Injector Technical Support Obtaining Methods9
3. 282-0490 Injector Purchase and Delivery10
3.1.282-0490 Injector Purchase Payment Term 10 3.2. 282-0490 Injector Main Sales Markets 10
3.2. 282-0490 Injector Main Sales Markets
3.3. 282-0490 Injector Declaration Requirements10
3.3. 282-0490 Injector Declaration Requirements 10 3.4. 282-0490 Injector Shipping Ways 10
3.5. 326-4700 Injector Lead time10
3.6.282-0490 Injector Logistics Time for Destination Out of China's Areas
3.7. 282-0490 Injector Packing
4. 282-0490 Injector Storage Standard12
5. Company Information
5.1. Company Introduction13
5.2. Contact Information
6. Copyright Statement
SARAN SA

SPARST SHADNET ALL SHEART, SH $\leq k^{(i)}$

320D Injector 282-0490 Technical File SR SP SPARS Street Street Street Street

SHUPPE 1. 282-0490 Injector Introduction

	1		
1.1.282-0490 In	octor Pacie	Inform	tion
1.1.202-0470 111	ector Dasic		เนงแ

1.1.282-0490 Injec	tor Basic Information
Title	China made new 320D injector 282-0490 fuel injector for C6.6 Engine
SKU 1	G1DS150010R7673
SKU2	G1DS15002820490

1.2. 282-0490 Injector Common Part Number

(1) Injector Exchange Information

1.2. 282-0490 Injector Common Part Number (1) Injector Exchange Information								
Injector Part Number	Re-manufactured Part Number	Replacement Number	OE Number					
282-0490	10R-7668	321-0990	2645A709					
2820490	10R7668	3210990	2645A705					
all all all the	all all all all all a	276-8290	2645A731					
30	N. M. M. A	2768290	2645A743					
The the the	The The The	289-7501	the the the					
Shall Shall Shall	and all all a	2897501	1 - A - A					
		293-9590						
	all all all all	2939590	E. A. E. A. E. A.					

(2) 282-0490 Matching Information

Car Model	Engine	Engine
Motor Grader	State State State	31 12M 31 31
Wheel-Type Loader	938H 938H	and a start of the start of the start
Engine - Generator Set Track-Type Loader	C6.6 strand strand	STANDART STANDART STA
Engine - Industrial	C6.6 ¹ ALIMAT ACC.6 ¹	Perkins 1106D Engine

1.3. 282-0490 Injector Part Number Common Writing

282-0490, 282 0490, 2820490, 10R-7668, 10R 7668, 10R7668, 321-0990, 321 0990, 3210990, 276-8290, 276 8290, 2768290, 289-7501, 289 7501, 2897501, 293-9590, 293 9590, 2939590, 2645 A709, 2645A 709, 2645 A 709, 2645A709, 2645 A705, 2645A 705, 2645 A 705, 2645A705, 2645 A731, 2645A 731, 2645 A 731, 2645A731, 2645 A743, 2645A 743, 2645 A 743, 2645A 743

1.4. 282-0490 Injector Parameter

Adaptation System: Common Rail System	6
njector Series: 320D C6.6 Series	
njector Type: Electromagnetic Injector	6
/ehicle Configuration Information: 320D Engines	
1.5.282-0490 Injector Specifications and Dimensions njector Size: 20cm* 10cm *10cm =2000cm ³ (L*W*H=V)	8
njector Size: 20cm* 10cm *10cm =2000cm3 (L*W*H=V)	

Injector Net Weight: 0.5kg

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd

Injector Gross Weight: 0.55kg Injector Quality: China Made New Package Size: 22 cm* 13 cm *13 cm = 3718 cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 282-0490 Injector Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque.

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 282-0490 Injector Customized Service

(1) Injector Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces. Customized injector packages no less than 1000 pieces. Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark

authorization and the sample of logo image file.

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd

• Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.8. 282-0490 Injector Packing List and Package Size

(1) Injector Sp	are Parts List	The The The The	and all all a
No.	1	2	3
SALES T' SALE	⁵¹⁷ state and state and state and state	SALL SHOWALL SH	ADALL NUMER STREAMER STR
Image St ^{alling} St ^{alling}	STT SPLERTT SPLERTT SPL	SALTAT SALTAT S	States States - States - State
	100 100 100 100 100	The The The The	The The The
Name	Fuel Injector	O-Ring	Nozzle Protective Cover Cap
Description	Fuel injector part number 282-0490	Ensure to meet the standard of the sealing performance between the injector and the engine	Protect nozzle holes from being polluted and blocked
No.	4	5	6
Stutenti Image Stutenti			
Name	Injector Oil Inlet Tube Cap	Solenoid valve protective cover	VCI Anti-rust Bag
Description	Protect oil inlet from being polluted and blocked	Protect the solenoid body and terminal posts from external forces	Prevent fuel injector from rusting
No.	7	8	9
Jimage Ji		and and all the state of the st	
Name	Bubble Bag	SHUMATT Injector Packing Box	Nozzle Gasket
Description	Prevent the injector from being damaged by external forces	Package for injector and injector accessories	Used to ensure the tight fit between the tight cap end of the injector and the engine

A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel

injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd

 $\mathcal{A}^{[i]}$

A VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly $S^{R^{(j)}}$ 519.55 after using. -Stall - Stall

A The injector and the installation parts should be coated with appropriate sealing oil during installation.

SALENST at the 9.^{9.2055} SPLEIT $s^{\alpha\beta}$ $\leq \lambda^{(0)}$



1.9. 282-0490 Injector Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

SPANSER Stall B $\otimes^{(0)}$ $\psi^{(0)}$ $\otimes^{\mathbb{N}}$ $\otimes^{\mathbb{N}}$. 188⁶ . 1995 (** ait^{hea} - 1995 C 19⁴⁷

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd



1.10. 282-0490 Injector Warranty Instructions

(1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) Injector Warranty Coverage

120 1000 within 15 days after customer receives the 282-0490 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 282-0490 injector has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

st. 65 E. 18 C 1 No 1 Do ත්රි Tips: For products not covered by warranty, our company can provide paid maintenance services. For

products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Injector Out of Warranty Coverage

The warranty period has expired.

RETERT Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment. e^{-2} а.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality

12

and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the SPUTT SHUDE system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual. $\mathcal{O}_{\mathcal{O}}$ 125 100 120 100 de la

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.


1.11. 282-0490 Injector Manufacturer

Injector manufacturer: Shenzhen Shumatt Technology Co., Ltd

2. 282-0490 Injector Technical Support

2.1. 282-0490 Injector Part Number Location

1) E.g.: The injector part number see as follows

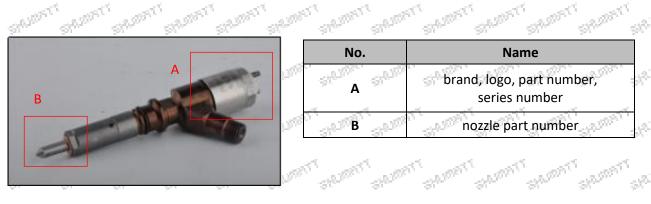


2.2. 326-4700 Injector Application Scenarios



Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd





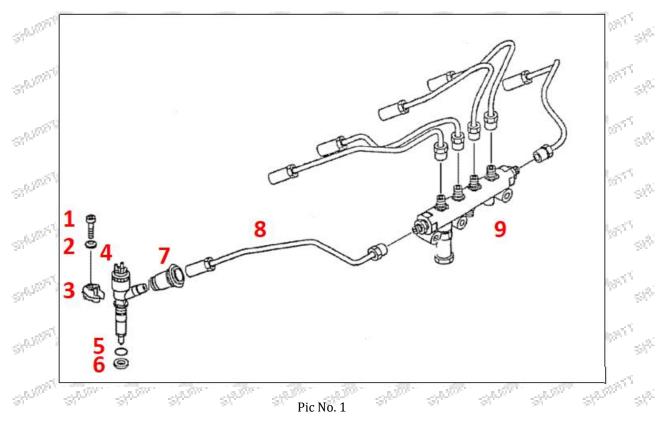

- ALTER ST	AND AND AND A	Att	and a start as the	water.	and and the same and the same the			
No.	Name	No.	Name N		No. Name		Name	
3 ¹⁰ 1	Adaptor Fixing Bolt	2 🛒	Gasket	2 ⁰⁰ 3 3	Fuel Injection Adaptor			
4. 	Fuel Injector	5	Injector O-Ring	6	Injector Nozzle Gasket			
7	Intake Gasket	8	Intake	9	High Pressure Common Rail Pipe			
2.3.282-0	2.3. 282-0490 Injector Installation							

2.3. 282-0490 Injector Installation

(1) 282-0490 Injector Installation Precautions: and a start and a

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd

The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual;

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

• When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

A Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket
and O-ring.

A Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

• When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

A It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 282-0490 Injector Reasons of Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.
- (5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

A Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd

2.5. 282-0490 Injector Causes to Damage

- (1) Don't operate properly according to engine maintenance manual during dis-assembly or installation, resulting in damage to the injector.
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the
- water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive
- exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons 177892 CONTRACT. ATTRACT. can cause damage to the injector.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector. e 10 -172 \mathcal{D}_{22}
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.
- (6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original - SHUTTER standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life.
- (9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.

A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6. 282-0490 Injector Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Injector Information Query Software

314³⁰⁶ TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get and the NEWS . 1000 the download and installation tutorial.

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

a galler

3. 282-0490 Injector Purchase and Delivery

3.1.282-0490 Injector Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat Please contact our salesmen for specific payment information.

3.2. 282-0490 Injector Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc

3.3. 282-0490 Injector Declaration Requirements

STREET. AND ALL Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

SH150

 $ch^{(\beta)}$

3.4. 282-0490 Injector Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be and and a start provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. 326-4700 Injector Lead time

Lead time: Send out within 3 - 7 working days after receiving payment (Except for special products and special cases).

3.6.282-0490 Injector Logistics Time for Destination Out of China's Areas

DHL Logistics Time:	al al an	Star.	260 3	Ser.	Stor.	- 83 ₆₀	23 Bar	Star.	Star.	$\otimes_{\mathbb{Q}^{2}}$
Country or Region of Departure	Hong Kong, China		Countries or ns of Asia	Aus	stralia and N Zealand	lew	Europe	America	Other Countries	
China's Mainland	7 Days	- State 7	Days	le sur	8 Days	$\mathbb{S}^{\mathbb{N}}$	8 Days	8-12 Days	7-10 Days	- 93

Country or Region of Departure. China's Mainland LIDS Logistics Times

UPS Logistics Time: Country or Region of Departure: China's Mainland							
Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time		
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days		
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days		
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days		
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days		
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days		
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days		
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days		
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days		
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days		
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days		
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days		
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days		
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days		
India and	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days		
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days		
Kuwait	-7-10 Days	·	all all		and Land		

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd

The logistics time is for reference only, subjects are according to the actual arrival.

3.7.282-0490 Injector Packing

SPRINGHTT SPRING SPLERT Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

A The packing tray is made of plastic and can be recycled.

🔺 Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

120 18 C A Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film,

and white wrapping protective film to avoid personal injury. SPLINT







ATTEN

Pic No. 2 Domestic express packaging: Wrapped by Transparent tape

Pic No. 3 International express packaging: Wrapped with yellow tape after wrapping black protective film

STATEST



Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd

11/16

Pic No. 4

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

-ALTER S al start -17.875 4. 282-0490 Injector Storage Standard

12.00 (1) Choose a suitable storage place

and the 1240 The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area No. dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

11 Car

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

and the

 $\varphi^{(0)}$

 $\mathfrak{S}^{\mathbb{N}}$

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked $\mathrm{ss}^{\mathrm{h}^{\mathrm{S}^2}}$ in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time.

🖺 It is forbidden to store acid, alkali, salt and other substances together with the injector. SPRING 58358

The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information

ſ E (



Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China ATTRACT 18⁵⁵ S. FREET

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding

product maintenance reasons (Reference: <u>1.10.326-4/00 Injector Warranty Instructions</u>)								
20	1 - AL - AL -	21 - 21 - 21 - 21	stor. Stor. Stor.	Sec. Sec.				
5.2	. Contact Information	1						
No.	Name	WeChat/ WhatsApp	Email	Facebook	YouTube			
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li			
2.51	Ivy	+86-18025309821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY			
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca			
46	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt			
5.30	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt			
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie			
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt			
8,000	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li			
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca			
10	Eric	+86 18319033618	sales3@shumatt.com					
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt			
12	Sylvia	+86 18312499884	sales6@shumatt.com		1 1			
	al al a	Visit http://shumatt.com to ob	tain the latest information of salesme	en 🚽				
	al ^{er} . al ^{er} . al ^{er}	PS: Shumatt's sales-men's er	mails are all end with @shumatt.com	1	Print and Print and			

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd

6. Copyright Statement

 $\mathbb{S}^{\mathbb{N}^3}$ The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in " 320D Injector 282-0490 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "320D Injector 282-0490 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "320D Injector 282-0490 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use " 320D Injector 282-0490 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

sh^{jû} SAUG2R SAUTTAN $\varphi^{\mathbb{R}^{i}}$ $\otimes^{(0)}$ $g_{i}^{(0)}$ $\psi^{(0)}$ $\mathfrak{S}^{[0]}$ $\mathbb{S}^{(0)}$