3126 Injector 178-6342 Technical File

SKU:Z1K31774752K1K



3126 INJECTOR

Stand Stan

States' States'

1. 178-6342 Injector Introduction
1.1.178-6342 Injector Basic Information
1.2. 178-6342 Injector Common Part Number1
1.3. 178-6342 Injector Part Number Common Writing1
1.3. 178-6342 Injector Part Number Common Writing
1.5 178-6342 Injector Specifications and Dimensions
1.6. 178-6342 Injector Quality Control
1 7 170 (242 laise stee Customics)
1.7. 178-6342 Injector Customized Service
1.9. 178-6342 Injector Testing Standard and Certificate3
1.10. 178-6342 Injector Warranty Instructions
1.10. 178-6342 Injector Warranty Instructions
2 178-6342 Injector Technical Support 5
2.1. 178-6342 Injector Part Number Location
2.2. 178-6342 Injector Installation
2.3. 178-6342 Injector Reasons of Not Working Normally6
2.3. 178-6342 Injector Reasons of Not Working Normally62.4. 178-6342 Injector Causes to Damage6
2.5. 178-6342 Injector Technical Support Obtaining Methods7
3. 178-6342 Injector Purchase and Delivery7
3.1.178-6342 Injector Purchase Payment Term
3.2. 178-6342 Injector Main Sales Markets 7 3.3. 178-6342 Injector Declaration Requirements 7
3.4. 178-6342 Injector Shipping Ways7
3.5. 178-6342 Injector Lead time
3.6.178-6342 Injector Logistics Time for Destination Out of China's Areas
3.7. 178-6342 Injector Packing
4. 178-6342 Injector Storage Standard
5. Company Information
5.1. Company Introduction
5.2. Contact Information11
6. Copyright Statement
alphan alphan alphan alban, alban, alphan alphan, alphan, alphan, alphan, alban, alban, alb
and the state of
bi bi bu
and the state of the
Show they show they done they show they show they they done they also
and

3126 Injector 178-6342 Technical File

1. 178-6342 Injector Introduction

1.1.178-6342 Inje	ector Basic Information
Title	China made new 3126 injector 178-6342 fuel injector
SKU 1	Z1K31774752K1K
- All - All -	

1.2. 178-6342 Injector Common Part Number

(1) Injector Exchange Information - 10

Number	Part	Replacement Number	OE Number
10R-1257	15	177-4752	The line The
10R1257	ф. 4	1774752	n star star star
	10R-1257	10R-1257	10R-1257 177-4752

(2) 178-6342 Matching Information

Car Model	Engine	Engine
TRACK-TYPE TRACTOR	D5N	D6N
GRADE MIT AND	120H	CONT AND TO ADD TO ADD TO
WHEEL-TYPE LOADER	938G II	
1.3. 178-6342 Injector Part Num	ber Common Writing	ADDET SHADET SHADET SHADET SH

1.3. 178-6342 Injector Part Number Common Writing

178-6342, 178 6342, 1786342, 177-4752, 177 4752, 1774752, 10R-1257, 10R 1257, 10R1257

1.4. 178-6342 Injector Parameter

Adaptation System: Common Rail System

Injector Series: 3126 Series

Injector Type: Electromagnetic Injector

Vehicle Configuration Information: 3126 Engines

1.5. 178-6342 Injector Specifications and Dimensions

33.50

Injector Size: 36 cm* 12 cm *11 cm =4752 cm³ (L*W*H=V)

Injector Net Weight: 1.5kg

Injector Gross Weight: 1.7kg

Injector Quality: China Made New

Package Size: 38 cm* 14 cm *13 cm =6916cm³

Injector Type: Electromagnetic Injector

MOQ: 4 Pieces

1.6. 178-6342 Injector Quality Control 20825051 S. S. LEWIS

(1) Injector Testing

SPARS All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions. 98°

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque.

(3) Injector Inspection (1) and and and and and and and and and

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop. AND AND AND

1.7. 178-6342 Injector Customized Service

(1) Injector Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector Customized Service Requirements:

1. 18 S The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

s.

 $\mathcal{A}^{(2)}$

Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.


1.8. 178-6342 Injector Packing List and Package Size

(1) Injector Spare Parts List

No.	1	2	3
AND AND	and and a second se	All and a second se	1. The second
Image			
Name	Injector Assy	Nozzle Protective Cover Cap	VCI Anti-rust Bag
Description	Injector Assy Fuel injector part number 178-6342	Protect nozzle holes from being polluted and blocked	Prevent fuel injector from rusting
No.	4	5	6
Image			
Name	Stelling Stelling Stelling	Injector Packing Box	Anti-rust Bag
escription	Prevent the injector from being damaged by external forces	Package for injector and injector	Prevent fuel injector from rusting

A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury. The The Trans Trans. The Alter The Alter The Alter The

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

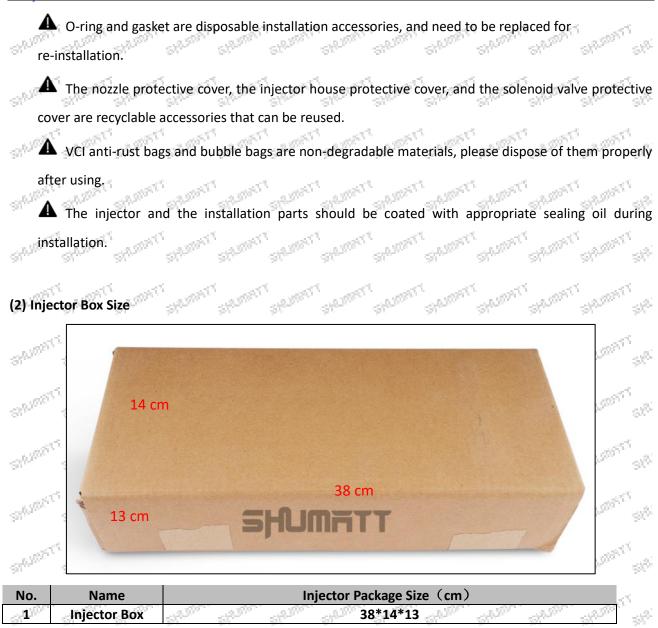

1.9. 178-6342 Injector Testing Standard and Certificate


We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.



Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

SHUMATT

Shenzhen Shumatt Technology Co., Ltd

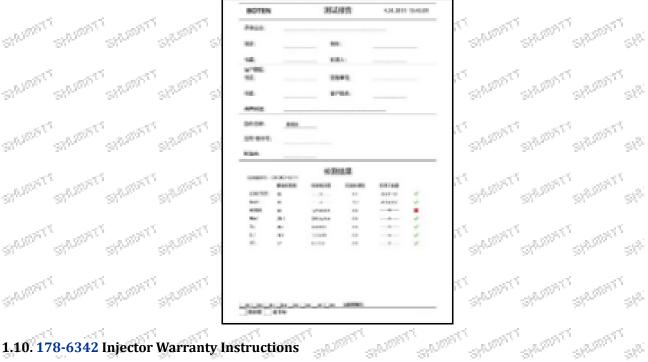

1.10. 178-6342 Injector Warranty Instructions

(1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc. State State

(2) Injector Warranty Coverage

"Within 15 days after customer receives the 178-6342 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 178-6342 injector has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

A Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality 50,50 and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11. 178-6342 Injector Manufacturer

Injector manufacturer: Shenzhen Shumatt Technology Co., Ltd

2. 178-6342 Injector Technical Support

2.1. 178-6342 Injector Part Number Location

1) E.g.: The injector part number see as follows

		No.	Name	
	STREET STREET STREET	A SUMA SUM	brand, logo, part number,	al di
	CELEVIT SPLEVIT SPLEV	STRATION STRAT	Stranger Stranger Stranger 2	de la
2.2.170.6242 Intertor In] Stollation States	OT SPEEDEDT SPEEDE	TT SAUDATT SAUDATT SAUDATT SAUDATT	d.

2.2. 178-6342 Injector Installation

178-6342 Injector Installation Precautions: The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of

the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual;

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust

spots, etc.

10 a A Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the

fuel injector.

33⁹⁰ A When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket

and O-ring.

f A Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

 $g^{(1)}$ 1997 -18 C $a^{(1)}$ When installing the injector on the engine, please carefully check the components related to the

installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

A It is forbidden to operate the bare injector for a long time in an environment with serious dust $S^{k^{(l)}}$ stille. pollution and corrosion to iron products.

A It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.3. 178-6342 Injector Reasons of Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.
- (5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

ant. Before installing, carefully check whether other components in the common rail system except the fuel

injector are damaged so as to prevent the fuel injector from not working properly after being replaced. SAUTT SPORT SHUDDA

2.4. 178-6342 Injector Causes to Damage

- (1) Don't operate properly according to engine maintenance manual during dis-assembly or installation, -State - Seller -240300 resulting in damage to the injector . -18³⁹⁶⁵
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to
- the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced
- during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and

cause damage to the fuel injector.

- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.
- (6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector.
- For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life. 100
- (9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.

18¹⁰ a⁶⁷ and a 1700 100 19 C -📣 Before replacing the fuel injector, please check the engine parts carefully according to the engine

maintenance manual to avoid the fuel injector being damaged again after replacement. " THERE THERE THERE THERE THERE 100

2.5. 178-6342 Injector Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit <u>http://shumatt.com</u> to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial.

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3. 178-6342 Injector Purchase and Delivery

3.1.178-6342 Injector Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat Please contact our salesmen for specific payment information.

3.2. 178-6342 Injector Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3. 178-6342 Injector Declaration Requirements

NOTE C Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. 178-6342 Injector Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required

3.5. 178-6342 Injector Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and - 82,00 -37special cases).

3.6.178-6342 Injector Logistics Time for Destination Out of China's Areas

No. States	10. NO. 11	10. NO. 1	10.7
	- 1990	1000 C	- 10 March 10
DHL Log	ictics Tir	no.	1000
	131113 111		

3.6.178-6342 Injector Logistics Time for Destination Out of China's Areas							
DHL Logistics Time:	Star.	260 - 260 - 2	ton Stor Ste	Sec.	- Show	Star.	$\otimes_{G_{\mathcal{D}}}$
Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries	
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days	$\mathbb{R}^{(n)}$

LIPS Logistics Time. Country or Region of Departure. China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India State	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	all all	all all a	and and and	and the second

The logistics time is for reference only, subjects are according to the actual arrival.

3.7.178-6342 Injector Packing

Stellart SPUTT SALES **Domestic express packaging:** Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

15 100 55 15 C 65 M SPADAL SPERAL SPACE A The packing tray is made of plastic and can be recycled.

A Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

11 C 1. C. The The The The The The The St 19 C -1 Bar A Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film,

and white wrapping protective film to avoid personal injury. Years Theory and a second and the

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd Tel W



8/13



Pic No. 1 Domestic express packaging: Wrapped by Transparent tape Pic No. 2 International express packaging: Wrapped with yellow tape after wrapping black protective film

 $\phi^{(0)}$



Pic No. 3

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4. 178-6342 Injector Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion

SHUMATT Shenzhen Shumatt Technology Co., Ltd

of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

- Co

 $\mathcal{G}^{3,2}$

 $\mathfrak{S}^{\mathbb{N}}$

(4) Stack Properly

5 at h After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked A STORY 17 Million in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found ANS P di^{nge} to be damaged or dried up, it should be cleaned and re-applied oil in time.


It is forbidden to leave the injector exposed in the air for a long time.

aller aller It is forbidden to store acid, alkali, salt and other substances together with the injector.

ADAT SADAT SADAT SADAT SADAT A The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information

 $\mathcal{A}^{\mathcal{A}^{\mathcal{D}^{\mathcal{C}}}}$



Global Exhibitions

REPORT 5.1. Company Introduction

Sh Sh

Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd

st^{adh}

There There There There

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

17.7775 ST. ANT Telephone: +86-755-23215133

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

10/13

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

✔ After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.326-4700 Injector Warranty Instructions</u>)

5.4	. Contact million mation	t 25 25 .	1. 1. 1. 1.	a	-66		
No.	Name	WeChat/ WhatsApp	Email	Facebook	YouTube		
1.01	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li		
2	lvy	+86-18025309821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY		
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca		
4	Janny and	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt		
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt		
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie		
7 .00	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt		
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li		
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca		
10	Eric	+86 18319033618	sales3@shumatt.com		Sec. Sec.		
11	(Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt		
12	Sylvia	+86 18312499884	sales6@shumatt.com	4	1 1		
	Visit http://shumatt.com to obtain the latest information of salesmen						
- 91	Str. Str.	PS: Shumatt's sales-men's e	mails are all end with @shumatt.com	Str. Str.	97° - 97°		

5.2. Contact Information

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in " 3126 Injector 178-6342 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "3126 Injector 178-6342 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "3126 Injector 178-6342 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use " 3126 Injector 178-6342 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.