

3300 SERIES

STUDATS

3300 Injector 4W-7015 Technical File

States States

1. 4W-7015 Injector Introduction1
1.1. 4W-7015 Injector Basic Information
1.2. 4W-7015 Injector Common Part Number1
1.3. 4W-7015 Injector Part Number Common Writing1
1.4. 4W-7015 Injector Parameter
1.5. 4W-7015 Injector Specifications and Dimensions1
1.6. 4W-7015 Injector Quality Control
1.7 AW-7015 Injector Customized Service 2
1.8. 4W-7015 Injector Packing List and Package Size
1.9. 4W-7015 Injector Testing Standard and Certificate4
1.10. 4W-7015 Injector Warranty Instructions.
1.10. 4W-7015 Injector Warranty Instructions
2. 4W-7015 Injector Technical Support
2.1. 4W-7015 Injector Part Number Location
2.2. 4W-7015 Injector Installation
2.3. 4W-7015 Injector Reasons of Not Working Normally7
2.3. 4W-7015 Injector Reasons of Not Working Normally7 2.4. 4W-7015 Injector Causes to Damage7
2.5. 4W-7015 Injector Technical Support Obtaining Methods7
3. 4W-7015 Injector Purchase and Delivery
3.1.4W-7015 Injector Purchase Payment Term
3.2. 4W-7015 Injector Main Sales Markets
3.2. 4W-7015 Injector Main Sales Markets 8 3.3. 4W-7015 Injector Declaration Requirements 8
3.4. 4W-7015 Injector Shinning Ways 8
3.5. 4W-7015 Injector Lead time
3.6.4W-7015 Injector Logistics Time for Destination Out of China's Areas
3.7. 4W-7015 Injector Packing
4. 4W-7015 Injector Storage Standard
5. Company Information11
5.1. Company Introduction
5.2. Contact Information12
6. Copyright Statement
store
and the state of the
bu bu bu bu bu du du du du bu
SWARPER SWA
Show they show they done they show they show they they done they also
and

3300 Injector 4W-7015 Technical File

SAUTER -10.502 1. 4W-7015 Injector Introduction

1.1.4W-7015 Inje	ctor Basic Information
Title	China made new 3300 injector 4W-7015 fuel injector
SKU 1	G1F14W7015DYGJT
SKU 2	G1F14W7015YGJT

1.2. 4W-7015 Injector Common Part Number

(1) Injector Exchange Information							
Injector Part Number Re-manufactured Part Number		Replacement Number	OE Number				
4W-7015	0R-3419	4W-7015	n star star sta				
4W7015 0R3419 4W7015 /							

e an ^{an t}hair a (2) 4W-7015 Matching Information N OPAN Car model Engine Engine | Engine | Engine Engine Engine Engine SPLINETT D4H . anti . anti D3 D3B D4B 53 54 4 4A 4P D5C D5C TRACK-TYPE TRACTOR 3 3P 3S D3C D4C 55 5A PATLGP 4S D5C PAT D3C II D4CII de de PAT INTEGRATED TOOL HOLDER IT12 IT18 IT18B TT28 IT28B 1. 18 M.C. . 1. 18 E 935B 931 931B 931C 931C II 935C 935C II CRAWLER LOADER 943 953 910 WHEEL-TYPE LOADER 916 926 926E G910 G926 G916 ENGINE - INDUSTRIAL fi^{ster} 3204 D4HTSK CRAWLER TYPE LUMBER COLLECTOR 4P 54H Ч. II. ENGINE-MACHINE 3204 ^{غر}الدي WHEEL TYPE LUMBER COLLECTOR 508 EXCAVATOR 215B E180 EL180

1.3. 4W-7015 Injector Part Number Common Writing OR-3419, OR 3419, OR3419, 4W-7015, 4W 7015, 4W7015 1.4. 4W-7015 Injector Parameter Adaptation System: HEUI SYSTEM Injector Series: 3300 Series $\otimes^{(0)}$ Injector Type: Mechanical Injector Vehicle Configuration Information:3300 Engines 1.5. 4W-7015 Injector Specifications and Dimensions Injector Size: 20cm* 3.5cm *3.5cm =245cm³ (L*W*H=V) - and the - 1995 V.

Injector Net Weight: 0.32kg Injector Gross Weight: 0.4kg Injector Quality: China Made New Package Size: 22cm* 4cm *4cm = 352cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 4W-7015 Injector Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque.

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 4W-7015 Injector Customized Service

(1) Injector Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

• Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

ander and

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd

SALENET SAUDER SPUTT 1.8. 4W-7015 Injector Packing List and Package Size (1) Injector Spare Parts List

No.	1	2	3
Show Show			
Station State		×	
Name	Injector Assy	Nozzle Protective Cover Cap	Intake hole Cover Cap
Description	Injector Assy Fuel injector part number 4W-7015	Protect nozzle holes from being polluted and blocked	Protect the oil inlet hole from pollution and blockage
No.	4	5	6
shi ^{ll} shill shillmage			SANDAL SANDAL SANDAL SA
Name	VCI Anti-rust Bag	Injector Packing Box	and an an are
Description	Prevent fuel injector from rusting	Package for injector and injector accessories	at at at
and and	S. SHERN, SHERN, SHERN, SH	The States Street, Street,	Street, Street, Street, Str.

A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury. 12.2007.57 ALTERN'S ALTER T 4.575777 17.803.24 12.578457 ARTICLE sS^{0}

O-ring and gasket are disposable installation accessories, and need to be replaced for

SPR. DOR'T

SPREAT

re-installation.

SPRINT A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective SHUDATT SAUDATT cover are recyclable accessories that can be reused.

SPRINT

A VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using. SHERE SHERE SHERE SHERE SHERE SHERE SHERE SHERE - All

A The injector and the installation parts should be coated with appropriate sealing oil during installation.

(2) Injector Box Size

ante.

sh^{jh}

SALTING

Mob/Whatsapp: +86 13410541523 Email :ruby@shumatt.com © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

	4 cm		-	
			3	
		22 cm		
	4 cm			
No.	Name	Injector Package Size (cm)		

1.9. 4W-7015 Injector Testing Standard and Certificate

1

Injector Box

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

4*4*22

SWILL SWIDT SWIDT SWIDT S	BOTEN	第2月音 (3.31) (56.0)	IT SHADALL SHADALL SHADA
Sher Sher She She 3	Pega		Store Store Store
		en	
SWARTS STREAMS STREAMS STREAMS	12	68A:	TT SAUDTT SAUDTT SAUDT
sm sm sm sm s		15+1	20 20 20
A A A A		8788.	A 14 14
SAMONT SAMONT SAMONT SAMONT	0108.80		TT SPATIANT SPATIANT SPATT
Stor. Stor. Stor. Stor. 34	10.000		su. su. su.
A A A A	KIDA		A 14 14
SAUDILI SAUDALI SAUDALI SAUDALI SA	COMPANY, CANADANY,	6.0412	TI SAUDATI SAUDATI SAUDA
su. su. su. su si	Sector S	100000 10000 001100	31. 31. 31.
	547 H	1 1/ 21420/ 2	
SHAMPIT SHAMPIT SHAMPIT SHAMPIT SH	Alexandre (M.) Ter alexandre	303454 43 4" 14000 13 4"	TI SADATI SADATI SADA
stor, stor, stor, stor, st	10 10 10 10 10 10 10 10 10 10 10 10 10 1	1000 00 1 V 1000 00 1 V	-sm -sm -sm
			~ ~ ~
Street Street Street Street			T SADAT SADAT SAD
21. 21. 21. 31. 31			SV. SV. SV.
	LALING ALM	DACADA MINI	5
States	2.9°	stor stor st	SADAL SADAL SADAL SADA
gan gan gan gan ga	1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 -	- SW1 - SW1 - SW1	SAT SAT SAT

1.10. 4W-7015 Injector Warranty Instructions

(1) Product Warranty Conditions and Instructions
 It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the

engine, 4. Engine noise, 5. oil leakage etc.

(2) Injector Warranty Coverage

and and and 1080 C and a special Within 15 days after customer receives the 4W-7015 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 4W-7015 injector has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

Tips: For products not covered by warranty, our company can provide paid maintenance services. For

products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, CORNEL !! earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the 37,500 3 Mar system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual. 20 100 100 120 1720 1 Sa 100

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.


1.11. 4W-7015 Injector Manufacturer

Injector manufacturer: Shenzhen Shumatt Technology Co., Ltd

and C 2. 4W-7015 Injector Technical Support

2.1. 4W-7015 Injector Part Number Location

1) E.g.: The injector part number see as follows

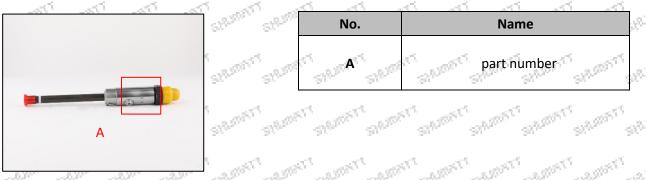

2.2. 4W-7015 Injector Installation

(1) 4W-7015 Injector Installation Precautions:

The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual;

 $\mathcal{C}^{(0)}$ A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector. 82.00

A When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

A Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the

fuel injector.

2,275-17 1000 A When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket

and O-ring. Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

A When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

f A It is forbidden to operate the bare injector for a long time in an environment with serious dust Strain State pollution and corrosion to iron products.

A It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.3. 4W-7015 Injector Reasons of Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.
- (5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.4. 4W-7015 Injector Causes to Damage

- (1) Don't operate properly according to engine maintenance manual during dis-assembly or installation, resulting in damage to the injector .
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the
- lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced
- during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.
- (6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life.
- (9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.

A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.5. 4W-7015 Injector Technical Support Obtaining Methods

(1) Injector Technical File, visit http://shumatt.com to get the technical file.

(2) Injector Technical Videos

Facebook: Visit <u>https://www.facebook.com/hison.li</u> to get the technical videos, constantly follow can get more information.

- 490

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial.

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3. 4W-7015 Injector Purchase and Delivery

3.1.4W-7015 Injector Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat Please contact our salesmen for specific payment information.

3.2. 4W-7015 Injector Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3. 4W-7015 Injector Declaration Requirements

1750 Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. 4W-7015 Injector Shipping Ways

SHITTE Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be NTO CO provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

-story

3.5. 4W-7015 Injector Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.4W-7015 Injector Logistics Time for Destination Out of China's Areas

DHL Logistics Time:

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan ^{®11}	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Staly Str	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days

South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days	
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days	8.
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days	0.01
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days	
India Store	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days	gal ^a r
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days]
Kuwait	7-10 Days	Street Stores .	all all a	and shall sh	²	giĝi.

The logistics time is for reference only, subjects are according to the actual arrival.

3.7. 4W-7015 Injector Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. **International express packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

• The packing tray is made of plastic and can be recycled.

1000

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

A Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film,





 $\mathfrak{sl}^{\mathbb{N}}$

 $S^{(0)}$

Pic No. 1 Domestic express packaging: Wrapped by Transparent tape

Pic No. 2 International express packaging: Wrapped with yellow tape after wrapping black protective film



Tel: +8675523215133 Website : www.shumatt.com



Pic No. 3

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4. 4W-7015 Injector Storage Standard

(1) Choose a suitable storage place

SHUMATT

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area and Car dry.

all the

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

and and a start a start a start . After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time.

It is forbidden to store acid, alkali, salt and other substances together with the injector.

A The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information when i share share



Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

SPORT

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

THE THE THE ATT A THE ATT AND A THE ATT AND A THE ATT AND A THE ATT A

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

58.⁵⁷⁸

Mob/Whatsapp: +86 13410541523 Email :<u>ruby@shumatt.com</u> © 2023 Shenzhen Shumatt Technology Co., Ltd • After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.326-4700 Injector Warranty Instructions</u>)

5.2	. Contact Information	1	the set of the set	6	ST water		
No.	Name	WeChat/ WhatsApp	Email	Facebook	YouTube		
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li		
2	lvy	+86-18025309821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY		
3. ₃₀ 0	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca		
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt		
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt		
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie		
7300	Bhi Ada Bhi	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt		
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li		
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca		
10	Peric 39	+86 18319033618	sales3@shumatt.com	All All	All de		
11	[™] Wayne [™] (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt		
12	Sylvia	+86 18312499884	sales6@shumatt.com	i sti	Star Sta		
de la constante	Visit http://shumatt.com to obtain the latest information of salesmen						
	PS: Shumatt's sales-men's emails are all end with @shumatt.com						

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in " 3300 Injector 4W-7015 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "3300 Injector 4W-7015 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "3300 Injector 4W-7015 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use " 3300 Injector 4W-7015 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.