

L096PBD Injector Nozzle Technical File

SKU1: G6DJ1000L096PBD

SKU2: G1H14000L096PBD

SKU3: G1X1000L096PBD

SKU4: G1T2000L096PBD

SHUMATT NOZZLE
More Cost-effective Solution for Diesel Nozzle

Series
M00 M05 M06 M17 V06 G2 G3 G3P G4 110 120 111
115 116 117 124 0414 CR E1 E3 A F2 3200 C7 C9 C-9
C10 C12 C18 C11 C13 C15 C13E C15E XPI M11 N14 X15

Technical drawing showing various views of the nozzle:

- Top view: Shows the nozzle tip with a diameter of 1.4000 and a height of 0.8500. It includes a 10-degree chamfer and a 0.1500 diameter hole.
- Side view: Shows the nozzle body with a diameter of 1.3000 and a length of 1.2000. It includes a 0.1500 diameter hole and a 0.1000 diameter hole.
- Front view: Shows the nozzle body with a diameter of 1.3000 and a length of 1.2000. It includes a 0.1500 diameter hole and a 0.1000 diameter hole.
- Bottom view: Shows the nozzle body with a diameter of 1.3000 and a length of 1.2000. It includes a 0.1500 diameter hole and a 0.1000 diameter hole.

SHUMATT
Shumatt Technology Co., Ltd

Shumatt
169
Established By
Huihui Li And Ruby Li

L096PBD Injector Nozzle Technical File

Content

| | |
|--|----|
| 1. L096PBD Injector Nozzle's Introduction | 3 |
| 1.1. L096PBD Injector Nozzle's Basic Information | 3 |
| 1.2. L096PBD Injector Nozzle's Common Written Part Number | 3 |
| 1.3. L096PBD Injector Nozzle's Application Information | 3 |
| 1.4. L096PBD Injector Nozzle's Specifications and Dimensions Parameters..... | 4 |
| 1.7. L096PBD Injector Nozzle's Warranty Instructions | 6 |
| 1.8. L096PBD Injector Nozzle's Manufacturer..... | 7 |
| 2. L096PBD Injector Nozzle's Technical Support..... | 7 |
| 2.1. L096PBD Injector Nozzle's Cleaning | 8 |
| 2.2. L096PBD Injector Nozzle's Inspection | 8 |
| 2.3. Injector Test After Maintenance | 8 |
| 2.4. List of Tools Used During Measurement and Installation..... | 10 |
| 2.5. Cause of Damage to L096PBD Injector Nozzle | 10 |
| 2.6. L096PBD Injector Nozzle Technical Support Obtaining Methods..... | 11 |
| 3. L096PBD Injector Nozzle's Purchase and Delivery..... | 11 |
| 3.1. L096PBD Injector Nozzle's Purchase Payment Terms | 11 |
| 3.2. L096PBD Injector Nozzle's Main Sales Market. | 11 |
| 3.3. L096PBD Injector Nozzle's Declaration Requirements..... | 11 |
| 3.4. L096PBD Injector Nozzle's Shipping Ways..... | 11 |
| 3.5. L096PBD Injector Nozzle's Lead Time..... | 11 |
| 3.6. L096PBD Injector Nozzle's Logistics Time for Destination Out of China's Areas | 11 |
| 4. L096PBD Injector Nozzle's Storage Standard | 12 |
| 5. Company Information..... | 13 |
| 5.1. Company Introduction..... | 13 |
| 5.2. Sales-men's Contact Information..... | 14 |
| 6. Copyright Statement..... | 14 |

L096PBD Injector Nozzle Technical File

1. L096PBD Injector Nozzle's Introduction

1.1. L096PBD Injector Nozzle's Basic Information

| Title | Common Rail L096PBD Injector Nozzle | Quality |
|-------|-------------------------------------|----------------|
| SKU1 | G6DJ1000L096PBD | China Made New |
| SKU2 | G1H14000L096PBD | |
| SKU3 | G1X1000L096PBD | |
| SKU4 | G1T2000L096PBD | |

1.2. L096PBD Injector Nozzle's Common Written Part Number

| Injector Nozzle Order Number | Injector Nozzle Engraved Number |
|------------------------------|---------------------------------|
| / | L096PBD |

1.3. L096PBD Injector Nozzle's Application Information

(1) L096PBD Injector Nozzle's Application for Injectors' Part Number

| Injector Part Number | Replacement Injector Part Number | Replacement Injector Part Number | Replacement Injector Part Number | OEM | OEM | OEM |
|----------------------|----------------------------------|----------------------------------|----------------------------------|-------------------------|---------------------------------|---------|
| R00001Z | R00002Z | R00101Z | R00301Z | / | / | R00001Z |
| R00002Z | R00001Z | R00101Z | R00301Z | / | / | R00002Z |
| R00101Z | R00001Z | R00002Z | R00301Z | 2S7Q9K546AH/ 1152989 | / | R00101Z |
| R00301Z | R00001Z | R00002Z | R00101Z | 1376694/1226 331 | 3S7Q9K54 6AJ/2S7Q 9K546AJ | R00301Z |
| R00401Z | R00201Z | R01001D | / | 2C1Q9K546AB | / | R00401Z |
| R01001D | R00201Z | R00401Z | / | 2C1Q9K546BA | / | R01001D |
| R00201Z | R00401Z | R01001D | / | 2C1Q9K546AA | / | R00201Z |

(2) L096PBD Injector Nozzle's Compatible Models

| Vehicles/Equipment with First-Time Installation | Manufacture |
|--|-------------|
| FORD MONDEO COMMON RAIL DURATORQ TDCI 2.0 | / |
| FORD MONDEO COMMON RAIL >>03 DURATORQ TDCI 2.0 130 PS 96KW | / |
| FORD MONDEO(130 HP)/TRANSIT DURATORQ TDCI 2.0 COMMON RAIL | / |
| FORD PUMA 2.0 TRANSIT 125 PS SERVICE ONLY | / |
| FORD MONDEO(130HP)/TRANSIT DURATORQ TDCI 2.0 COMMON RAIL | / |

(3) L096PBD Injector Nozzle Part Number Common Writing

L096PBD

1.4. L096PBD Injector Nozzle's Specifications and Dimensions Parameters

- Injector Nozzle Size: 6 cm*1.5cm *1.5 cm
- Injector Nozzle Tube Dimensions: 7 cm *2 cm *2 cm
- Single Injector Nozzle Weight: 0.03kg
- Injector Nozzle 10 PCS Per Box: 10 cm *8 cm *4cm
- Injector Nozzle Weight 10 PCS Per Box : 0.3kg
- Injector Nozzle Quality: China Made New Injector Nozzle
- Injector Nozzle MOQ: 10 PCS

1.5. L096PBD Injector Nozzle's Quality Control

(1) Injector Nozzle Testing

All parts of the injector nozzle are subjected to precision testing, high temperature testing, low temperature testing, withstand pressure testing, leakage testing, durability testing, and various working conditions testing.

(2) Injector Nozzle Inspection

The factory inspection of the injector nozzle is undergone three inspections: full inspection, random inspection, and batch inspection. Different brands of test benches are used to test the same injector nozzle for more than three times for factory inspection, and the fuel injector nozzle installation testing environment are progressed in dust-free workshop.

(3) Injector Nozzle Installation

When matching the valve cap and valve steam, Shumatt strictly complies with the standard of valve cap and valve stem clearance technical indicators to ensure that each nozzle meets the factory standards and use standards.

QUALITY CONTROL BEFORE PACKING



| | |
|--|---|
|  <p>01 Mahr profilometer, inspecting oil needle angle and roughness.</p> |  <p>05 Double busbar measuring instrument, inspecting the hole profile and taper of the nozzle after medium-hole grinding.</p> |
|  <p>02 Mahr roundness measuring instrument, inspecting nozzle medium-hole cylindricity and oil needle outer - diameter cylindricity.</p> |  <p>06 Flow detector, inspecting nozzle orifice flow.</p> |
|  <p>03 Zygo white light scanner, inspecting the flatness of the large flat surface of the nozzle.</p> |  <p>07 5-Parameter nozzle testing machine, inspecting various data of nozzle finished products, store if qualified.</p> |
|  <p>04 Microscope, inspecting the nozzle seat surface and the pressure chamber dimensions.</p> |  <p>08 All quality inspection procedures have been passed, awaiting packaging for delivery to the customer.</p> |

1.6. L096PBD Injector Nozzle's Detailed display

(1) Injector Nozzle Physical display

| | | |
|-------|--|-----|
| | | |
| Front | Side | Top |
| | | / |
| Side | Engraving (with a neutral or shumatt logo) | / |

(2) Injector Nozzle Tube

| | | |
|-------------|-------|------------|
| | | |
| Rectangular | Round | Customized |


(3) Injector Nozzle Packaging Display

| | | |
|-----------------------------|-----------------------------|-------------------------|
| | | |
| G6 SHUMATT Nozzle Packaging | Neutral Nozzle Packaging | XINGMA Nozzle Packaging |
| | | / |
| LIWEI Nozzle Packaging | Customized Nozzle Packaging | / |

Note: G6 SHUMATT nozzle packaging is preferred.

(4) Requirements for the printing format of injector nozzle labels:

Nozzle label content:

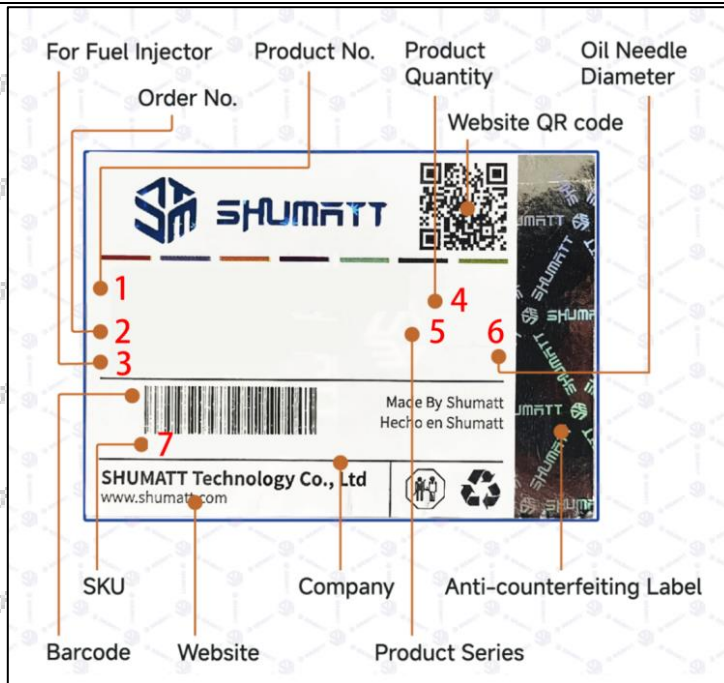

| No. | Name | Specification |
|-----|---------------------------|--|
| 1 | Nozzle engraving number | L096PBD |
| 2 | Nozzle order number | / |
| 3 | Applicable fuel injectors | For R00001Z |
| 4 | Packaging quantity | 12 PCS |
| 5 | Series | CR |
| 6 | Oil needle diameter | / |
| 7 | SKU | G6DJ1000L096PBD G1H14000L096PBD G1X1000L096PBD G1T2000L096PBD |

(5) Injector Nozzle’s Customized Service Requirements:

Custom nozzle pins with or without engraving, minimum order quantity: 100 pieces.

Custom injector nozzle barrels, minimum order quantity: 2000–3000 pieces.

Custom nozzle packaging boxes, minimum order quantity: 1000 units.

For customized products with designated logos, the OEM manufacturer shall provide trademark authorization and official logo image files.

▲ Customized nozzles are non-returnable and non-exchangeable once sold if without quality defects.

1.7. L096PBD Injector Nozzle’s Warranty Instructions

(1) Injector Nozzle Warranty Conditions and Instructions

It is necessary to provide photos, videos, or test reports from fuel injector testing equipment as evidence to the sales staff when abnormalities occur during the use of the fuel injector nozzle.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) Injector Nozzle Warranty Coverage

Within 15 days after customer receives the **L096PBD** injector nozzle if there is a performance failure

and the product has no appearance damage, customer can choose to replace it or repair it;

If the L096PBD injector nozzle has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the product is confirmed to be without fault, it will be returned as is.

(3) Injector Nozzle Out of Warranty Coverage

The warranty period has expired.

Injector nozzle failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Injector nozzle damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

Injector nozzle failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector nozzle failure due to system pressure exceeding system approved pressure.

Injector nozzle failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector nozzle failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector nozzle failure caused by not following the installation angle specified in the injector maintenance manual.

Injector nozzle failure caused by not following the cleaning requirements specified in the injector maintenance manual.

Injector nozzle failure caused by failure to replace consumable parts as specified in the injector maintenance manual.

1.8. L096PBD Injector Nozzle's Manufacturer



Injector nozzle's manufacturer: Shenzhen Shumatt Technology Co., Ltd



SHUMATT ODM NOZZLE
Support Packing Box and Label Customization

label
ODM BRAND

SCHEMATIC DIAGRAM OF THE FUEL INJECTOR'S NOZZLE OPERATION



ABOUT US
With deep roots in the global automotive parts fuel market, Shumatt maintains sharp insights into market shifts, prioritizes global customer needs, and strives to provide premium products and services worldwide.

- 3 Workplaces
- 4 Factories
- Serving customers in 169 countries and regions
- Exhibition participation in 26+ countries and regions
- Field research to 69 countries and over 300 cities

2. L096PBD Injector Nozzle's Technical Support

2.1. L096PBD Injector Nozzle's Cleaning

(1) Before installation, the fuel injector nozzles should be cleaned in an ultrasonic cleaner for 3-5 minutes to remove stains, dust, powder, rust-preventive oil oxides, paraffin bases, naphthenic bases, intermediate bases, salts, lead naphthenate, zinc naphthenate, sodium petroleum sulfonate, barium petroleum sulfonate, calcium petroleum sulfonate, trioleic tallow diamine, and rosin amine from the nozzle surface.

(2) Use compressed air to remove the cleaning fluid adhering to the nozzle surface after cleaning, ensuring it meets the usage standards.

2.2. L096PBD Injector Nozzle's Inspection

(1) Check the nozzle guide sleeve, spring, washer, and tightening nut for deformation, cracks, thread damage, quenching defects, air leaks, and rust. The nozzle tightening nut must be replaced if it has been disassembled more than 5 times, as shown in the diagram below.



(2) Replace the nozzle tightening nut and the nozzle sealing copper gasket.

(3) Check whether the gap between the nozzle needle and the nozzle shell is within the standard range and whether it reaches the standard for use.

- ⚠ All parts should be examined for wear under a microscope at least 20 times larger
- ⚠ Deformation, cracking, thread damage, quenching defects, or air leakage in the injector cap can cause black smoke from the vehicle and damage the injector.
- ⚠ Injector opening pressure greater than or less than the specified range may cause injector damage.
- ⚠ Failure to replace wearing parts in time during maintenance may lead to fuel injector damage.

2.3. Injector Test After Maintenance

(1) After installation, it needs to be tested on the test bench.



⚠ The correct injector type should be selected for testing.

(2) The test results need to be ensured that the following items are within the standard data range of the test stand.

LEAK TEST: Test whether sealing test is up to standard or not.

In this step, no injector collector should be installed at the nozzle during the test so as to observe whether the nozzle is dripping oil, meanwhile observe that all joints are no oil leaking.

The static oil return of the test should not exceed 8mm²/H, otherwise, you need to check whether the high-pressure sealing ring, valve assembly, and stroke parameters of the injector are within the standard range.

VL: Test whether full load oil (main injection, high speed) is up to standard or not

This step needs to be combined with vehicle driving conditions, such as power, fuel consumption and smoke as well as the maintenance of the engine, if there is situation of insufficient power, fuel consumption is high, thick black smoke and irregularly maintenance of the engine, the engine needs to be maintained according to the maintenance handbook at very first time.

Each of injector part needs to be adjusted and checked if there is any damage according to above situations to ensure the injector is normal. After make sure the injector works normal, you need to reduce the armature stroke if too much oil injection, and increase the armature stroke if too little oil injection.

The error of each injector should be controlled in 6mm³/HH when adjusting.

TL\EM: Test whether the torque point, emission point, exhaust limit, fuel supply reach standard or not

Through this test, it is detected that when the oil injection is too little, the engine's acceleration is slow, vice versa, when the oil injection is too much, the engine's acceleration will produce black smoke and the engine excessive exhaust emissions.

Injector nozzle spring force gasket, armature stroke, lift gasket and solenoid valve spring force gasket determine whether exhaust restriction and injector fuel supply reach standard

LL: Test if the idle fuel supply reached the standard

This test detects oil injection is too much will cause engine idle smoke, otherwise if the oil injection too little will cause engine idling easy to stall, or difficult to start.

The uneven of oil injection causes the unstable rotation speed of engine, making noise, and increase the engine swing in the acceleration process.

Each injector error should be controlled within 2mm³/HH when adjusting.

Idle speed fuel supply quantity mainly by adjusting the nozzle spring force gasket.

VE: Test whether the pre-injection meets the standard

This test detects when oil injection is too much will cause cylinder knocking while the engine is working

and the exhaust emissions is not up to standard (smoke).

While when oil injection is too little will cause big noise while the engine is working, the engine is difficult to start, the engine weak acceleration, slow response of injector.

Each injector error should be controlled within 0.5mm³/HH when adjusting.

2.4. List of Tools Used During Measurement and Installation

| | | | |
|-------------|--|--|---|
| Image |  |  |  |
| SKU | CRT084 | CRT220 | CRT079 |
| Description | Torque wrench: 07-110nm 1/2 used to control tightening force and Angle during installation | Fuel injector stroke measuring tool: used to measure buffer stroke of fuel injector, armature stroke and remaining air gap | Micrometer: used to measure gasket thickness |
| Image |  |  | / |
| SKU | / | CRT281 | / |
| Description | Ultrasonic cleaning machine: used for cleaning fuel injector and parts | Common rail injector test equipment: check the injector working condition | / |

2.5. Cause of Damage to L096PBD Injector Nozzle

- (1) Fuel injector nozzle failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in fuel exceeding standard requirements.
- (2) The nozzle is normally worn due to long time working under high temperature.
- (3) Wear of the nozzle needle causes blockage of the oil hole, and insufficient fuel injection results in the injector failing to operate normally.

⚠ The wear of the nozzle orifice leads to the increase of fuel quantity, resulting in black smoke of the vehicle, and the fuel injector can not work properly when it is serious.

⚠ If the nozzle needle can not move smoothly, stuck may cause serious damage to the injector nozzle.

⚠ The rusting of the nozzle spring leads to spring fracture and black smoke from the vehicle.

⚠ Wear on the injector spring adjusting shim reduces the injector's opening pressure, causing the injector to pump more fuel, resulting in black smoke from the vehicle. In severe cases, this can lead to the injector malfunctioning.

⚠ Wear on the injector needle valve lift adjusting shim causes the injector needle valve stroke to increase, resulting in increased fuel injection volume and causing the vehicle to emit black smoke. In severe cases, this can lead to the injector malfunctioning.

⚠ The nozzle tip cracked due to prolonged high-temperature and high-intensity operation.

2.6. L096PBD Injector Nozzle Technical Support Obtaining Methods

- (1) Nozzle Technical File , visit <http://shumatt.com> to get the technical file
- (2) Injector Technical Videos

Facebook: Visit <https://www.facebook.com/hison.li> constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit <http://shumatt.com> to get the technical videos.

- (3) Nozzle Information Query Software
TruckBook Parts EPC APP, Android/Apple App Store download and install, visit <http://shumatt.com> to get the download and installation tutorial
- (4) Search The nozzle test data through TruckBook Parts EPC APP.

3. L096PBD Injector Nozzle’s Purchase and Delivery

3.1. L096PBD Injector Nozzle’s Purchase Payment Terms

Payment Terms: T/T, PayPal, Alipay, WeChat

▲ Please contact our salesmen for specific payment information.

3.2. L096PBD Injector Nozzle’s Main Sales Market.

Injector Nozzle’s Main Sales Markets: Asia, Europe, North America, South America, Africa etc.

3.3. L096PBD Injector Nozzle’s Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. L096PBD Injector Nozzle’s Shipping Ways

Destination in China’s areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China’s areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. L096PBD Injector Nozzle’s Lead Time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases) .

3.6. L096PBD Injector Nozzle’s Logistics Time for Destination Out of China’s Areas

DHL Logistics Time:

| Country or Region of Departure | Hong Kong, China | Other Countries or Regions of Asia | Australia and New Zealand | Europe | America | Other Countries |
|--------------------------------|------------------|------------------------------------|---------------------------|--------|-----------|-----------------|
| China’s Mainland | 7 Days | 7 Days | 8 Days | 8 Days | 8-12 Days | 7-10 Days |

UPS Logistics Time: Country or Region of Departure: China’s Mainland

| Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time |
|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Japan | 3 Days | UK | 5-7 Days | Egypt | 5-7 Days |
| Turkey | 5-7 Days | Singapore | 3 Days | Switzerland | 5-7 Days |
| Bahrain | 5-7 Days | Latvia | 7-10 Days | New Zealand | 7-10 Days |
| Sri Lanka | 5-7 Days | Thailand | 3 Days | Austria | 5-7 Days |
| Romania | 5-7 Days | Vietnam | 3-5 Days | Estonia | 5-7 Days |

| | | | | | |
|-------------|-----------|-------------|-----------|----------------------|-----------|
| Malaysia | 3-5 Days | Israel | 5-7 Days | Mexico | 7-10 Days |
| France | 5-7 Days | America | 5-7 Days | United Arab Emirates | 5-7 Days |
| Italy | 5-7 Days | Netherlands | 5-7 Days | Bengal | 7-10 Days |
| Lebanon | 5-7 Days | Philippine | 3-5 Days | Greece | 7-10 Days |
| South Korea | 3 Days | Spain | 5-7 Days | Myanmar | 5-7 Days |
| Canada | 5-7 Days | Germany | 5-7 Days | Saudi Arabia | 7-10 Days |
| Portugal | 5-7 Days | Australia | 5-7 Days | South Africa | 7-10 Days |
| Denmark | 5-7 Days | Belgium | 5-7 Days | Ukraine | 7-10 Days |
| India | 7-10 Days | Qatar | 7-10 Days | Poland | 5-7 Days |
| Indonesia | 3-5 Days | Morocco | 7-10 Days | Pakistan | 7-10 Days |
| Kuwait | 7-10 Days | | | | |

▲ The logistics time is for reference only , subjects are according to the actual arrival.

4. L096PBD Injector Nozzle’s Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector nozzle is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injector nozzles are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injector nozzles placed in the room, and the corrosion of the fuel injector nozzles is significantly reduced.

Injector nozzles must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector nozzle is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the fuel injector nozzle package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

▲ It is forbidden to leave the injector nozzle exposed in the air for a long time.

▲ It is forbidden to store acid, alkali, salt and other substances together with the injector nozzle.

▲ The unpacked fuel injector nozzle must be rust-proof during secondary storage.

**GOOD STOCK
FOR
QUICK SHIPPING**

**MORE COST-EFFECTIVE
SOLUTION FOR DIESEL NOZZLE**

- High quality control by automated production high precision equipment.
- More cost-effective solution.
- Good after sales warranty support.

**Diesel
Nozzle
Warehouse**

5. Company Information



5.1. Company Introduction

Chinese Name: 深圳市舒马特科技有限公司

English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653507

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.7. L096PBD Injector Nozzle's Warranty Instructions](#))

5.2. Sales-men's Contact Information

| No. | Name | WeChat/ WhatsApp | Email | Facebook | YouTube |
|--|-------------------------------|------------------|--|-----------------|-----------------|
| 1 | Ruby | +86-13410541523 | ruby@shumatt.com | Hison Li | Hison Li |
| 2 | Ivy | +86-18025309821 | sales@shumatt.com | Ivy Shumatt | Shumatt IVY |
| 3 | Rebecca | +86-18025349821 | sales01@shumatt.com | Rebecca SHUMATT | SHUMATT Rebecca |
| 4 | Janny | +86-18028749821 | sales02@shumatt.com | Janny shumatt | Janny Shumatt |
| 5 | Sam | +86-13316859821 | Sales8@shumatt.com | Shumatt Sam | Sam Shumatt |
| 6 | Natalie | +86- 18938945856 | sales15@shumatt.com | Shumatt Natalie | Lin Natalie |
| 7 | Ada | +86-1342286353 | sales5@shumatt.com | Shumatt Ada | Ada Shumatt |
| 8 | Hison Li | +86-18318811871 | web@shumatt.com | Hison Li | Hison Li |
| 9 | Mecca | +86-18938948618 | sales11@shumatt.com | Shumatt Mecca | Shumatt Mecca |
| 10 | Eric | +86 18307033618 | sales3@shumatt.com | | |
| 11 | Wayne (Joaquín en español) | +86-13316959821 | wayne@shumatt.com | shumattwayne | Wayne Shumatt |
| 12 | Sylvia | +86 18312499884 | sales6@shumatt.com | | |
| Visit http://shumatt.com to obtain the latest information of salesmen | | | | | |
| PS: Shumatt's sales-men's emails are all end with @shumatt.com | | | | | |

6. Copyright Statement

The copyright of any contents "*L096PBD Injector Nozzle Technical File*" (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "*L096PBD Injector Nozzle Technical File*" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "*L096PBD Injector Nozzle Technical File*" in any way. At the same time, any conditions to spread, re-post, display the contents of "*L096PBD Injector Nozzle Technical File*" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "*L096PBD Injector Nozzle Technical File*" will violate the "*Copyright Law of the People's Republic of China Technical File*" and other laws and regulations and the provisions of relevant international conventions.